

DESIGN EXCELLENCE: COOL TECHNOLOGY

# **PROFESSIONAL**

---

## **Refrigeration Solutions**



# Design Excellence Cool Technology

---

Williams is one of the world's leading  
designers and manufacturers  
of professional refrigeration equipment.

# Index

<b>About Williams</b>	<b>01</b>
<b>Greenlogic</b>	<b>03</b>
<b>Accreditations</b>	<b>05</b>
<b>Upright Cabinet</b>	<b>07</b>
General Features	09
Garnet	13
Overnight Thaw	21
Zircon Fish	24
Meat Ageing	27
<b>Counter</b>	<b>31</b>
General Features	33
Opal, Emerald & Bakery	37
Varitemp Drawer	53
Aztra	56
Under Broiler	59
Onyx	63
Jade Preparation	67
Aztra Salad	71
Thermowell	74
<b>Beverage Counter</b>	<b>77</b>
Bottle Cooler	79
Bottle Well	85
Glass Chiller	88
Wine Cabinet	91
<b>Mobile Banqueting</b>	<b>95</b>
Heated & Refrigerated	97
<b>Modular</b>	<b>101</b>
Ruby	103
<b>Blast Chiller</b>	<b>107</b>
Why use Blast Chiller or Freezer	109
Reach-in Blast Chiller / Freezer	119
Roll-in Blast Chiller / Freezer + Blast Freezer	123
<b>Contact information</b>	<b>128</b>



**williams** 

# Williams Refrigeration was established in 1980 and is now one of the world's leading designers and manufacturers of innovative and award winning professional refrigeration.

Williams has built a global reputation over the years for performance, quality and value for money. Our vast product range includes high performance, energy efficient and sustainable refrigerated cabinets and counters, blast chillers, back bar, front of house display and mobile banqueting equipment.

Our commitment is to help customers meet the demands of complex legislation for food safety and energy efficiency, together with competitive pricing, professional advice and innovative design. Williams' focus on service and support has led us to attract some of the world's leading companies as customers.

Driven from our global headquarters in the UK, we have established manufacturing facilities in China and Australia and sales facilities around the world. At the heart of the Williams business is its reputation for excellence. The global business is driven by the vision and inspiration of the Head Office team in Kings Lynn and the resources and expertise offered by the technical teams at Williams' manufacturing locations. Williams has one of the industry's most highly skilled and experienced design teams, delivering new concepts and solutions that continue to lead the market.

Williams Refrigeration Hong Kong Limited supplies a vast range of professional refrigeration equipment to the Asian market from its manufacturing plant

in Dongguan. Backed up by a national distribution network and sales offices in Hong Kong, Shanghai and Beijing it is well equipped for serving its local market.

Our facilities are independently certified to ISO9001:2008, ISO14001, ISO22000 and China Compulsory Certification (CCC) and comply with CE, WEEE and RoHS. Our plant in Dongguan is equipped with the latest advanced production machinery and test equipment and operates from a common platform with our UK head office to deliver a consistent design, manufacturing and quality standard.

All products are built for performance, reliability and durability, even in the toughest and most arduous of conditions. We use Williams UK and European brand standard components to give you a global product assurance with the benefit of experienced local service support.

Williams Hong Kong boasts a prestigious client list throughout the region and has supplied many of its premium hotels, prestigious clubs, restaurants and fast food chains as well as Hong Kong and Chinese Government projects.

## Our Core Value:



**Reliability**



**Food Safety and Hygiene**



**Best Performance and Quality**



**Innovative and Excellent Design**



**Energy and Environmental Awareness**





Reducing Our  
Environmental  
Impact

Increasing  
Environmental  
Awareness



Working towards a greener,  
more environmentally responsible future.



**Saving  
Energy**



**Increasing  
Recycling**



**Reducing  
Waste**



**Reducing  
Emissions**

Greenlogic is Williams' commitment to supplying the most energy efficient and sustainable professional refrigeration in today's market. It's not limited to product design, Greenlogic covers our plant, manufacturing and management processes too.

Williams' commitment to green refrigeration stretches back decades. In the 1980s we were the first manufacturer to develop CFC-free insulation. In the 1990s we developed the first catering refrigeration to use an environment-friendly refrigerant with an Ozone Depletion Potential (ODP) of zero.

We've pioneered a raft of greener technologies, ranging from energy-saving Smart Controllers to systems using eco-friendly refrigerants.

### Greenlogic Products

Our products are 98% recyclable with the remaining 2% treatable for heat recovery. But to ensure our products are the most sustainable in today's market means considering each and every component.

Not just the contribution they make to the product's overall energy efficiency but the impact they have on the environment, and ensuring they have been produced in a sustainable and ethical manner.

Our CoolSmart Controllers minimise the cabinet's energy consumption through processes such as fan and heater pulsing, intelligent defrost and independent management of evaporator and condenser fans.

Our insulation delivers structural strength and superior thermal properties while minimising environmental impact, through low GWP (Global Warming Potential) and zero ODP (Ozone Depletion Potential).

Recent innovations include low energy fans and bumper bars made from recycled materials, which resist corrosion to maximise service life. All coils are now electro deposition dipped - the most advanced cathodic coating technology available. The process has a lower environmental impact due to a reduction in the amount of solvents used.

A comprehensive choice of other energy saving features and options are available including self-closing doors, heavy duty gaskets, half doors and drawer packs.

Williams follow the AFE Group Ethical Trading Code and ensure compliance with it by our suppliers - assessing and grading each of them on the environmental management of their product and plant.

### Greenlogic Manufacturing

Williams holds ISO14001 Environmental Management certification across all of its manufacturing plants in UK, Australia and China, for the design, manufacture, installation and servicing of refrigeration products.

We are committed to reducing our environmental footprint and to becoming a zero to landfill business.

- Pallets are re-used and waste wood recycled.
- Packaging is 100% recyclable, although the bulk of it is reused.
- Waste and by products are dispatched to specialist waste processors.
- Williams have adopted a zero tolerance refrigerant leak strategy. All coils are pretested and again when the refrigeration system has been assembled using industry-best helium sensors.
- Rigorous standards are applied to liquid waste. We only use chemicals that are strictly required by our processes.
- We apply energy-saving technologies, from low energy lighting to plastic curtains that conserve heat in production areas.
- We follow energy-saving procedures, from sharing office space to do function-testing overnight with off-peak electricity.
- Our transport's carbon footprint is minimised through planned deliveries and full loads.

Staff is encouraged to think about sustainability at all times - to switch off equipment that's not being used, to avoid unnecessary use of resources, etc.

To know more about Greenlogic,

Please visit: [www.greenlogic.info](http://www.greenlogic.info)

# Accreditations



DESIGN EXCELLENCE: COOL TECHNOLOGY

## Our Production Plant in China

---

ISO9001:2015 (Quality Management System)

ISO14001:2015 (Environment Management System)

ISO22000:2018 (Food Safety Management System)

ISO45001:2018 (Occupational Health & Safety Management System)





PM 60021  
ISO 9001:2015  
OHS 615160  
ISO 45001:2018



EMS 556157  
ISO 14001:2015



20167  
ISO 22000:2018



## Our Products

---

CCC (China Compulsory Certification)

SASO (Saudi Arabian Standard Organization Certificate)

KC (Korea Certification)

CE, WEEE and RoHS



**Williams**  
**Professional Refrigeration**

# Upright Cabinet Series

Williams provides different types  
of upright refrigerated cabinets which are  
essential to a professional kitchen

# Upright Cabinet Series

---

## General Features



01.

### CoolSmart Controller



- **Automatic internal condition detecting to ensure efficient energy use**  
*Energy saving up to 15%*
- **Intelligent defrost function**  
*Ensures the evaporator working to its optimum performance*
- **The interval of compressor start and rest time can be limited**  
*Reduces wear and tear and prolonging compressor life*
- **Self-diagnostics**  
*Self performance check to indicate the operational condition*
- **Failsafe device for failure of thermocouple**  
*Minimises the loss of food products and reduces wear and tear of the compressor due to the sensors failed*
- **Audible and visual Hi/Lo, door open (over 5 minutes) alarm for freezer**  
*Ensures food quality and minimises energy consumption*
- **HACCP compliant**  
*Ensures the food safety of Williams products*

02.

### 304 grade stainless steel exterior and interior finish

*Foodsafe, durable and easy cleaning*

03.

### High density 75mm thick insulation foam with zero ODP (Ozone Depletion Potential) and low GWP (Global Warming Potential)

*Provides excellent thermal efficiency and is environmental-friendly*

04.

**Accurate helium leak detection system for entire refrigeration system**

*Quality guaranteed*

05.

**Automatic vaporising the defrost water**

*No drain connection is required*

06.

**Air release point on magnetic door gaskets**

*Excellent sealing and avoids slitting caused by door closing pressure*

07.

**Reversible door hinge**

*Able to change on site to ensure smooth work flow*

08.

**Designed and engineered to operate up to 43°C ambient**

*Effective in the harshest environment*

09.

**HACCP compliant**

*Ensures the food safety of Williams products*



11.

**Front and top vented refrigeration system**

*Space saving and allows compact refrigeration equipment set up*



12.

**Top-mounted refrigeration system with hidden evaporator**

*Maximises the internal capacity and easy servicing*



13.

**Adjustable racking system**


*Allows flexible storage and ease of cleaning*



14.

**Anti-tilt trayslides**

*Prevents tipping but easy to remove for cleaning*



10.

**Condenser and evaporator with Hydrophilic aluminium fins**

*Provides high corrosion resistance properties*



15.

**Cylindrical door locks**

*Added security and stock control*





16.

**Door mullion heaters**

*Anti-condensation and prevents potential dirt traps*



21.

**Hygienic one-piece stainless steel dished base with radiused corners**

*Easy for cleaning and prevents potential dirt traps*



17.

**Optional Heated film glass door**

*Anti-condensation and clear visibility*



22.

**Automatic fan cut out switch for freezer models**

*Avoids loss of cool air and reducing energy consumption*



18.

**Removable balloon type magnetic door gaskets**

*Prevents dirt traps and ensures easy replacement*



23.

**Forced air circulation system**

*Ensures fast and even cool air distribution*



19.

**Self-closing doors**

*Avoids heat ingress and reduces energy consumption*



24.

**Optional fully extendable work out drawer**

*Allows vertical access of the full-loaded GN pan*



20.

**Over 90° door opening**

*For easy loading and stock checking*



25.

**Adjustable legs or castors (Optional)**

*Maximises flexibility and stability*



A refrigerator is the only essential piece of catering equipment to keep operating 24 hours a day, 365 days a year.

---

Reliability and sustainability are highly significant

to a professional refrigerator. They are also the product commitments of Williams Refrigeration.

# Garnet Key Features

Hygienic optimised design with top-mounted refrigeration system



01. Top-mounted refrigeration system with hidden evaporator to maximise the internal capacity
02. Excellent thermal efficiency, high density 75mm thick polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
03. Adjustable racking system allows flexible storage \*
04. Anti-condensation door mullion heaters
05. Removable anti-tilt trayslides to prevent tipping \*
06. Reversible door hinge allows to change on site to ensure smooth work flow
07. Self-closing doors minimise cool air loss and reduce energy consumption
08. Over 90° door opening allows easy loading and stock checking
09. Hygienic one-piece dished base with radiused corners avoids potential dirt traps
10. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps

11. 145Hmm adjustable legs to ensure stability on an uneven floor
12. Forced air refrigeration system ensures effective air circulation \*
13. Static-cooled refrigeration system for FG1T(J) & FG2T(J) to keep fish moist and fresh
14. CoolSmart controller with clear digital display is designed for easy operation
15. Imported, durable and energy-efficient compressor
16. Automatic fan cut out switch for freezer models avoids cool air loss and reduces energy consumption
17. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties \*
18. Accurate helium leak detection system ensures the quality of the entire refrigeration system
19. Automatic defrost ensures the evaporator working to its optimum performance \*
20. Automatically vaporises defrost water, drainage is not required \*
21. Designed and engineered to operate up to 43°C ambient
22. Environmental-friendly CFC-free refrigerant (R134a or R404a)
23. HACCP compliant



11




12

14



16

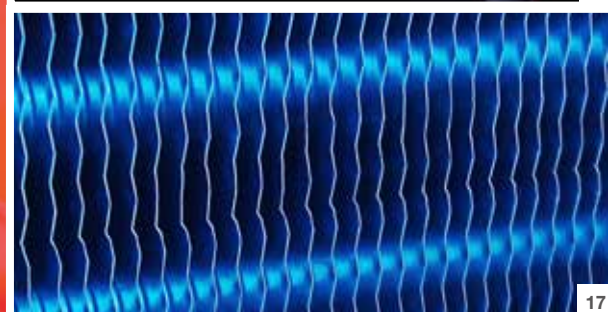

17

\* Not available for FG1T(J) and FG2T(J)

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.



# Garnet Specification

- Accommodates 2/1 GN size
- Foodsafe 304 grade stainless steel exterior and interior
- Galvanised steel exterior back and base
- Fitted with cylindrical lock for door(s)
- FG1T(J) and FG2T(J) are fitted with 38ømm drainage for maximum cleanliness





# Garnet Options



- 01. 304 grade stainless steel exterior back / base
- 02. Heated film glass door
- 03. Pass through door (add 37mm to depth)
- 04. 2 or 3 drawers bank for low half section \*
- 05. Cylindrical lock for drawer(s)
- 06. Internal LED for door type
- 07. Lock plate
- 08. Castors in lieu of legs
- 09. Accommodate 400 x 600mm size
- 10. Additional shelving / trayslides
- 11. 220V / 60HZ / 1PH

\* Available for HG1T(J) and HG2T(J) only



# Garnet Product Code

Example:

# HG2T(J)-SS-HGD



## 1. Temperature Range

H	=	+1/+4 °C
M	=	-2/+2 °C
F*	=	-2/+2 °C
L	=	-19/-22 °C
HL	=	+1/+4 °C & -19/-22 °C

## 2. Series

G	=	Garnet
---	---	--------

## 3. Number of compartment

1	=	1 compartment
2	=	2 compartments

## 4. Type of condensing unit

T	=	Top mounted condensing unit
---	---	-----------------------------

## 5. Type of Handle

(J)	=	New integral handle
-----	---	---------------------

## 6. Configuration

SEA	=	Half door
SS	=	Full door

## 7. Options

HGD	=	Heated film glass door
PT	=	Pass through door
N	=	2 drawers bank
W	=	3 drawers bank

\* Fish cabinet (static-cooled system)

# Garnet Product List

**G1T(J)-SEA** **G2T(J)-SEA**



**G1T(J)-SS** **G2T(J)-SS**



# Garnet Technical Data

Model	HG1T(J)	MG1T(J)	FG1T(J)	LG1T(J)	HLG1T(J)
<b>Temp Range (°C)</b>	+1 / +4	-2 / +2	-2 / +2	-19 / -22	+1 / +4 & -19 / -22
<b>External Dimension (mm)</b>					
Width	737				
Depth	824				
Height	1975				
<b>Internal Dimension (mm)</b>					
Width	587				
Depth	683				
Height	1370				Top: 525 Bottom: 565
<b>Thickness of 304 grade stainless steel (mm)</b>					
Exterior	0.7				
Interior	0.6				
Door or drawer	0.8				
<b>Opening Depth (mm)</b>					
Door type	1510				
Drawer type	1515			N/A	
<b>Maximum loading height of drawer (mm per drawer)</b>					
2 drawers bank	215			N/A	
3 drawers bank	100			N/A	
<b>Capacity (cu.ft / litres)</b>	21.7 / 616				18.5 / 525
<b>Power Supply</b>	220V / 50HZ / 1PH				
	13 amp plug				2 x 13 amp plug
<b>Power Input - Running (amps) *</b>					
Door or drawer type	3		4	3 (H) & 2.5 (L)	
<b>Rating Power (watts) *</b>	660		880	660 (H) & 550 (L)	
<b>Compressor (HP)</b>					
Door or drawer type	1/4		5/8	1/4 (H) & 1/2 (L)	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>					
Door or drawers bank	485		1844	485 (H) & 1550 (L)	
<b>Refrigerant</b>	R134a		R404a	R134a (H) & R404a (L)	
<b>Standard fittings for door type</b>					
PE coated shelves	4		N/A	4	
Trayslides (pair)	4		8 for -SS 7 for -SEA	4	

\* 20% increase for 60HZ power supply

Note: FG1T(J) is fitted with 38ømm drainage for maximum cleanliness

# Garnet Technical Data

Model	HG2T(J)	MG2T(J)	FG2T(J)	LG2T(J)
<b>Temp Range (°C)</b>	+1 / +4	-2 / +2	-2 / +2	-19 / -22
<b>External Dimension (mm)</b>				
Width				1400
Depth				824
Height				1975
<b>Internal Dimension (mm)</b>				
Width				1250
Depth				683
Height				1370
<b>Thickness of 304 grade stainless steel (mm)</b>				
Exterior				0.7
Interior				0.6
Door or drawer				0.8
<b>Opening Depth (mm)</b>				
Door type				1487
Drawer type	1515		N/A	
<b>Maximum loading height of drawer (mm per drawer)</b>				
2 drawers bank	215		N/A	
3 drawers bank	100		N/A	
<b>Capacity (cu.ft / litres)</b>				
45.9 / 1301				
220V / 50HZ / 1PH				
<b>Power Supply</b>				
13 amp plug		2 x 13 amp plug		13 amp plug
<b>Power Input - Running (amps) *</b>				
Door or drawer type	3.5		3 (x2) 4.5	
<b>Rating Power (watts) *</b>				
770		660 (x2)		990
<b>Compressor (HP)</b>				
Door or drawer type	1/3		1/4 (x2) 1	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>				
Door or drawers bank	623		970 3389	
<b>Refrigerant</b>				
R134a			R404a	
<b>Standard fittings for door type</b>				
PE coated shelves	8		N/A 8	
Trayslides (pair)	8		16 for -SS 14 for -SEA 8	

\* 20% increase for 60HZ power supply

Note: FG2T(J) is fitted with 38ømm drainage for maximum cleanliness



# Overnight Thaw Key Features

Designed for thawing frozen foods in a controlled condition to ensure food safety

01. Designed with forced air heating and cooling circuits which cycle alternatively keeping the food within the correct temperature range of 0°C to +3°C
02. Product does not exceed 3°C throughout the thawing process, therefore it can be safely stored in a refrigerated cabinet for up to 5 days after defrosting
03. Continual supply of thawed food can be achieved, additional food can be placed in the cabinet with no detrimental effect on those products already inside
04. Cooking thawed food is quicker and safer than cooking frozen food, eliminating the risk of cold spots once cooking has been finished
05. Fitted with digital thermometer for clear temperature display
06. Excellent thermal efficiency, high density 75mm thick polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
07. Anti-condensation door mullion heaters
08. Adjustable racking system allows flexible storage
09. Removable anti-tilt trayslides to prevent tipping
10. Self-closing doors minimise cool air loss and reduce energy consumption
11. Over 90° door opening allows easy loading and stock checking
12. Hygienic one-piece dished base with radiused corners avoids potential dirt traps
13. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
14. 135Hmm heavy duty, non-marking swivel and braked castors for easy positioning


## Specification

- Accommodates 427 x 550mm size
- Foodsafe 304 grade stainless steel exterior and interior
- Galvanised steel exterior back and base
- Fitted with 38ømm drainage for maximum cleanliness

## Options


1. 304 grade stainless steel exterior back / base
2. Cylindrical lock
3. Lock plate
4. Additional shelving / trayslides
5. 220V / 60HZ / 1PH

- 15. Forced air refrigeration system ensures effective air circulation
- 16. Imported, durable and energy-efficient compressor
- 17. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
- 18. Accurate helium leak detection system ensures the quality of the entire refrigeration system
- 19. Automatic defrost ensures the evaporator working to its optimum performance
- 20. Automatically vaporises defrost water, drainage is not required
- 21. Designed and engineered to operate up to 43°C ambient
- 22. Environmental-friendly CFC-free refrigerant (R134a)
- 23. HACCP compliant

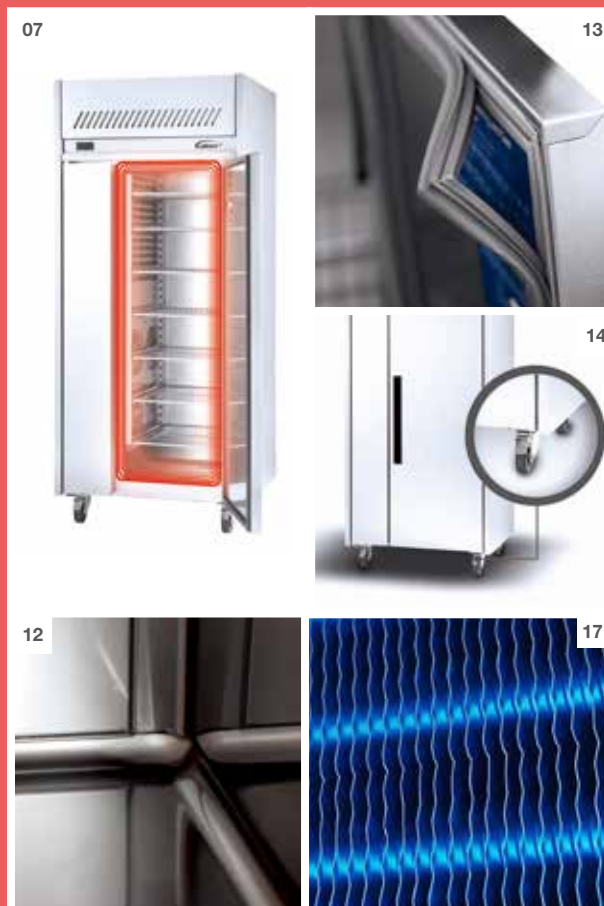

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

## Product List

OT1	OT2
	

# Overnight Thaw Technical Data

Model	OT1	OT2
<b>Temp Range (°C)</b>	0 / +3	0 / +3
<b>External Dimension (mm)</b>		
Width	865	1655
Depth (including 100mm vaporizing tray)	792	
Height	1965	
<b>Internal Dimension (mm)</b>		
Width	487	1045
Depth	560	
Height	1385	
<b>Thickness of 304 grade stainless steel (mm)</b>		
Exterior	0.7	
Interior	0.6	
Door	Exterior: 0.8 Interior: 0.6	
<b>Opening Depth (mm)</b>	1320	
<b>Capacity (cu.ft / litres)</b>	19.3 / 548	40.7 / 1153
<b>Power Supply</b>	220V / 50HZ / 1PH	
	13 amp plug	
<b>Power Input - Running (amps) *</b>	4.7	8.9
<b>Rating Power (watts) *</b>	1034	1958
<b>Compressor (HP)</b>	1/3	1/2
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	623	950
<b>Refrigerant</b>	R134a	
<b>Standard fittings</b>		
PE coated shelves	7	14
Trayslides (pair)	7	14

\* 20% increase for 60HZ power supply

Note: all models are fitted with 38ømm drainage for maximum cleanliness

# Zircon Fish Key Features

Specifically designed for the storage of fish, static cooling system avoids drying out the fish



- 01. Static cooling system to keep fish moist and fresh
- 02. Fitted with 7 polypropylene containers for easy cleaning, lightness and durability, each with a removable slime tray
- 03. Excellent thermal efficiency, high density 75mm thick polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
- 04. Anti-condensation door mullion heaters
- 05. Self-closing doors minimise cool air loss and reduce energy consumption
- 06. Over 90° door opening allows easy loading and stock checking
- 07. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
- 08. CoolSmart controller with clear digital display is designed for easy operation
- 09. FZ18 is fitted with 20Hmm levelling feet and FZ18T is fitted with 100Hmm adjustable legs to ensure stability on an uneven floor
- 10. Imported, durable and energy-efficient compressor
- 11. Accurate helium leak detection system ensures the quality of the entire refrigeration system
- 12. Designed and engineered to operate up to 43°C ambient
- 13. Environmental-friendly CFC-free refrigerant (R134a)
- 14. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

# Zircon Fish

## Specification

- Accommodates 580W x 390D x 135Hmm polypropylene containers
- Foodsafe 304 grade stainless steel exterior and interior
- Galvanised steel exterior back and base
- Top-mounted and bottom-mounted refrigeration models for selection
- Fitted with 38ømm drainage for maximum cleanliness



## Options

1. 304 grade stainless steel exterior back / base
2. Cylindrical lock
3. 220V / 60HZ / 1PH

## Product List

FZ18



FZ18T



# Zircon Fish Technical Data

Model	FZ18	FZ18T
<b>Temp Range (°C)</b>	-2 / +2	-2 / +2
<b>External Dimension (mm)</b>		
Width	571	
Depth	698	
Height	1690	1770
<b>Internal Dimension (mm)</b>		
Width	450	
Depth	605	
Height	1198	
<b>Thickness of 304 grade stainless steel (mm)</b>		
Exterior	0.7	
Interior	0.6	
Door	Exterior: 0.8 Interior: 0.6	
<b>Opening Depth (mm)</b>	1180	
<b>Capacity (cu.ft / litres)</b>	11.5 / 327	11.4 / 324
<b>Power Supply</b>	220V / 50HZ / 1PH	
	13 amp plug	
<b>Power Input - Running (amps) *</b>	2.5	
<b>Rating Power (watts) *</b>	550	
<b>Compressor (HP)</b>	1/4	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	485	
<b>Refrigerant</b>	R134a	
<b>Standard fittings for door type</b>		
Polypropylene containers	7	
Trayslides (pair)	7	


\* 20% increase for 60HZ power supply

Note: all models are fitted with 38ømm drainage for maximum cleanliness



# Meat Ageing Key Features

Dry ageing steak gives a fabulous end product - a steak that's tender, full of flavour and delivers a greatly enhanced dining experience

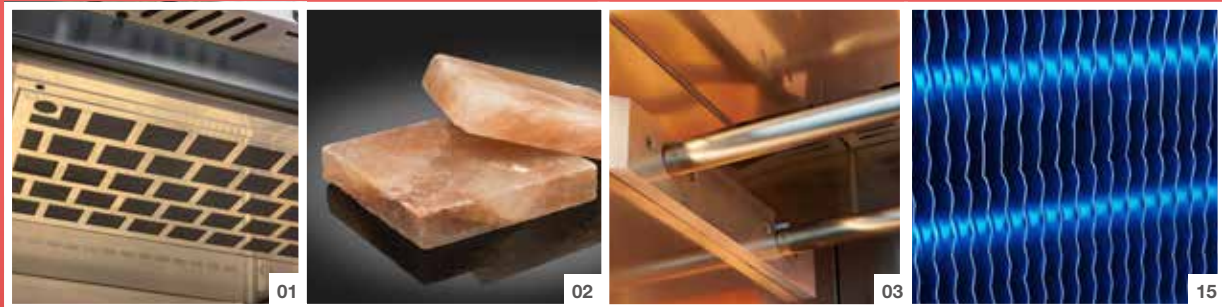

01. Activated carbon filter removes any organic molecules which cause odour from air circulated within the cabinet
02. Himalayan salt blocks assist with moisture management, improve flavour and enhance the looks and theatre of the meat ageing display
03. Removable hanging rods support the flexible arrangement in cabinet for the changeable operation flow
04. Excellent thermal efficiency, high density 75mm thick polyurethane insulation with Zero Ozone Depletion Potential and Low Global Warming Potential
05. Anti-condensation door mullion heaters
06. Adjustable and removable anti-tilt trayslides to prevent tipping
07. Self-closing doors minimise cool air loss and reduce energy consumption
08. Over 90° door opening allows easy loading and stock checking
09. Hygienic one-piece dished base with radiused corners avoids potential dirt traps
10. 145Hmm adjustable legs to ensure stability on an uneven floor
11. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
12. Forced air refrigeration system with UVC anti-germicidal light keeps air flow clean
13. Smart controller with clear temperature and humidity digital display
14. Imported, durable and energy-efficient compressor
15. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
16. Accurate helium leak detection system ensures the quality of the entire refrigeration system
17. Automatic defrost ensures the evaporator working to its optimum performance
18. Automatically vaporises defrost water, drainage is not required
19. Designed and engineered to operate up to 43°C ambient
20. Environmental-friendly CFC-free refrigerant (R134a)
21. HACCP compliant

# Meat Ageing

## Specification

- Accommodates 2/1 GN size
- Foodsafe 304 grade stainless steel exterior and interior
- Galvanised steel exterior back and base
- Fitted with foodsafe 316 grade stainless steel drip tray for salt blocks
- Fitted with cylindrical lock for door(s)

## Options

1. 304 grade stainless steel exterior back / base
2. Castors in lieu of legs
3. Additional shelving / trayslides
4. 220V / 60HZ / 1PH

## Product List

**BOH-MAR1**



**BOH-MAR2**



# Meat Ageing Technical Data

Model	BOH-MAR1	BOH-MAR2
<b>Temp Range (°C)</b>	+1 / +4	
<b>Relative Humidity (%)</b>	60 - 85	
<b>External Dimension (mm)</b>		
Width	737	1400
Depth (including 100mm vaporizing tray)	824	
Height	1975	
<b>Internal Dimension (mm)</b>		
Width	587	1250
Depth	683	
Height	1370	
<b>Opening Depth (mm)</b>	1440	
<b>Capacity (cu.ft / litres)</b>	21.7 / 616	45.9 / 1301
<b>Power Supply</b>	220V / 50HZ / 1PH	
	13 amp plug	
<b>Power Input - Running (amps) *</b>	3.5	4.5
<b>Rating Power (watts) *</b>	770	990
<b>Compressor (HP)</b>	3/7	1/2
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	964	1478
<b>Refrigerant</b>	R134a	
<b>Standard fittings</b>		
Stainless steel perforated shelves	2	4
Trayslides (pair)	2	4

\* 20% increase for 60HZ power supply



Williams has market-leading expertise in meat ageing equipment. For over a decade the company has been working with butchers, Michelin star chefs and casual dining operators who specialise in offering their customers dry aged beef.





Williams  
Professional Refrigeration

# Counter Series

Williams present a series of ergonomic counter type refrigerators, built to maximise storage space and available with a variety of options for greater user flexibility



# Counter Series

## General Features



01.

### Condensing Unit



- **Removable cassette type condensing unit and evaporator**
  - Zero down time, whole unit with evaporator can be replaced with new one immediately
  - Interchangeable temperature cassette unit allows flexible application
  - Easy for maintenance on-site if necessary
  - Allows ventilation and service maintenance at front, and thus enabling the compact equipment set up

02.

### CoolSmart Controller



- **Automatic internal condition detecting to ensure efficient energy use**  
*Energy saving up to 15%*
- **Intelligent defrost function**  
*Ensures the evaporator working to its optimum performance*
- **The interval of compressor start and rest time can be limited**  
*Reduces wear and tear and prolonging compressor life*
- **Self-diagnostics**  
*Self performance check to indicate the operational condition*
- **Failsafe device for failure of thermocouple**  
*Minimises the loss of food products and reduces wear and tear of the compressor due to the sensors failed*
- **Audible and visual Hi/Lo, door open (over 5 minutes) alarm for freezer**  
*Ensures food quality and minimises energy consumption*
- **HACCP compliant**  
*Ensures the food safety of Williams products*

---

03.

**304 Grade stainless steel exterior and interior finish**

*Foodsafe, durable and easy cleaning*

04.

**High density insulation foam with zero ODP (Ozone Depletion Potential) and low GWP (Global Warming Potential)**

*Provides excellent thermal efficiency and is environmental-friendly*

05.

**Accurate helium leak detection system for entire refrigeration system**

*Quality guaranteed*

06.

**Automatic vaporising the defrost water in remote type**

*No drain connection is required*

07.

**Air release point on magnetic door gaskets**

*Excellent sealing and avoids slitting caused by door closing pressure*

08.


**Designed and engineered to operate up to 43°C ambient**

*Effective in the harshest environment*

09.

**HACCP compliant**

*Ensures the food safety of Williams products*



10.

**Condenser and evaporator with Hydrophilic aluminium fins**

*Provides high corrosion resistance properties*



11.

**Varied table top profiles**

*Flexible for different customers' needs*



12.

**Adjustable racking system**

*Allows flexible storage and ease of cleaning*



13.

**Anti-tilt trayslides**

*Prevents tipping but easy to remove for cleaning*



14.

**Cylindrical door locks**

*Added security and stock control*



15.

**Door mullion heaters**

*Anti-condensation and prevents potential dirt traps*



20.

**Hygienic one-piece stainless steel dished base with radiused corners**

*Easy for cleaning and prevents potential dirt traps*



16.

**Optional Heated film glass door**

*Anti-condensation and clear visibility*



21.

**Air ducting for two sections or above**

*Ensures the cool air can spread to everywhere inside the counter*



17.

**Removable balloon type magnetic door gaskets**

*Prevents dirt traps and ensures easy replacement*



22.

**Forced air circulation system**


*Ensures fast and even cool air distribution*



18.

**Self-closing doors**

*Avoids heat ingress and reduces energy consumption*



23.

**Optional fully extendable work out drawer**

*Allows vertical access (without bullnose at front) of the full-loaded GN pan*



19.

**Over 90° door opening**

*For easy loading and stock checking*



24.

**Adjustable legs or castors (optional)**

*Maximises flexibility and stability*

Williams Refrigeration is renowned for its  
innovative designs  
and quality of  
product build

as well as its ability to provide tailor-made  
solutions. We have the technical know-how  
and expertise to design and create bespoke  
solutions.



# Opal, Emerald & Bakery Key Features

Ergonomic counter design with different Gastronorm size and configurations to suit any application



01. Removable cassette type condensing unit and evaporator for easy servicing with zero down time
02. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
03. Adjustable racking system allows flexible storage
04. Anti-condensation door mullion heaters
05. Removable anti-tilt trayslides to prevent tipping \*
06. Self-closing doors minimise cool air loss and reduce energy consumption
07. Over 90° door opening allows easy loading and stock checking
08. Hygienic one-piece dished base with radiused corners avoids potential dirt traps \*
09. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps

\* Available for Opal and Emerald only


Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.



10. Air ducting for two sections or above ensures the cool air is spread to everywhere inside the counter
11. 150Hmm adjustable legs to ensure stability on an uneven floor
12. Forced air refrigeration system ensures effective air circulation
13. CoolSmart controller with clear digital display is designed for easy operation
14. Imported, durable and energy-efficient compressors
15. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
16. Accurate helium leak detection system ensures the quality of the entire refrigeration system
17. Automatic defrost ensures the evaporator working to its optimum performance
18. Automatically vaporises defrost water, drainage is not required and applied to self-contain and remote type condensing unit
19. Designed and engineered to operate up to 43°C ambient
20. Environmental-friendly CFC-free refrigerant (R134a or R404a)
21. HACCP compliant



10

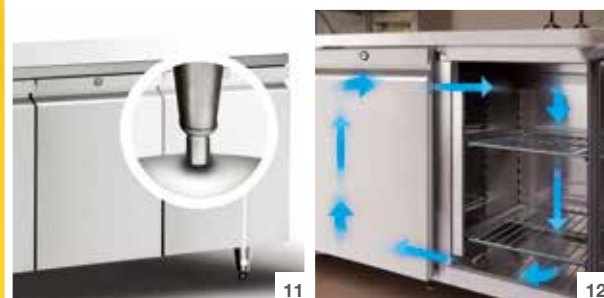


11

12



13

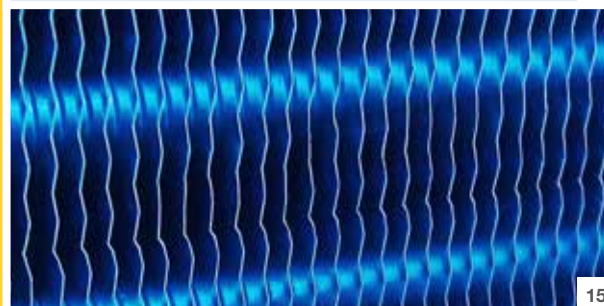

15



Professional Refrigeration > Counter Series

# Opal, Emerald & Bakery Specification

- Accommodates 1/1 GN size for Opal
- Accommodates 2/1 GN size for Emerald
- Accommodates 400 x 600mm EN size for Bakery
- Foodsafe 304 grade stainless steel exterior and interior
- 1.5mm thick durable 304 grade stainless steel table top
- Galvanised steel exterior back and base
- Fitted with cylindrical lock for door(s)



# Opal, Emerald & Bakery Options



02



10



04



13



05



14



07



15



17



09



18

01. 304 grade stainless steel exterior back / base
02. Heated film glass door
03. Pass through door (add 10mm to depth for Emerald)
04. Saladette opening \*
05. Raised pan holder \*
06. Wooden board under table top
07. Table top extension
08. 2mm thick 304 grade stainless steel table top
09. 2, 3 or 1/3 + 2/3 drawers bank \*\*
10. Cylindrical lock for drawer(s) \*\*
11. Lock plate
12. Internal LED for door type
13. Right-hand-side condensing unit
14. Remote type condensing unit
15. Back / side splash
16. Front / side skirting
17. Castors in lieu of legs
18. 50Hmm skirting with louvre for sitting on plinth
19. Additional shelving/ trayslides for door type
20. 220V / 60HZ / 1PH

\* Available for Opal and Emerald only  
 # Not available for LO3U/R(J) and LE2U/R(J)

# Opal, Emerald & Bakery

## Product Code

Example:














# HO3U(J)-XDNW-B-S



1. Temperature Range		
H	=	+1 / +4 °C
M	=	-2 / +2°C
L	=	-19 / -22 °C
2. Series		
O	=	Opal
E	=	Emerald
B	=	Bakery
3. Number of compartment		
1	=	1 compartment
2	=	2 compartments
3	=	3 compartments
4	=	4 compartments
4. Type of condensing unit		
U	=	Self-contained condensing unit
R	=	Remote condensing unit

5. Type of handle		
(J)	=	New integral handle
6. Configuration		
X	=	Location of the condensing unit / evaporator
D	=	Door
N	=	2 drawers bank
W	=	3 drawers bank
T	=	1/3 + 2/3 drawers bank
7. Options		
S	=	304 grade stainless steel back
HGD	=	Heated film glass door
PT	=	Pass through door
B	=	Back splash

# Opal Product List

O1U(J)-XD	O2U(J)-XDD	O3U(J)-XDDD	O4U(J)-XDDDD
			
O1U(J)-XN	O2U(J)-XNN	O3U(J)-XNNN	O4U(J)-XNNNN
			
O1U(J)-XT	O2U(J)-XTT	O3U(J)-XTTT	O4U(J)-XTTTT
			
O1U(J)-XW	O2U(J)-XWW	O3U(J)-XWWW	O4U(J)-XWWWW
			

# Opal Technical Data

Model	HO1U(J)	MO1U(J)	LO1U(J)	HO2U(J)	MO2U(J)	LO2U(J)
<b>Temp Range (°C)</b>	+1 / +4	-2 / +2	-19 / -22	+1 / +4	-2 / +2	-19 / -22
<b>External Dimension (mm)</b>						
Width	905		1370			
Depth	670					
Height	850					
<b>Internal Dimension (mm)</b>						
Width	390		855			
Depth	560					
Height	570					
<b>Thickness of 304 grade stainless steel (mm)</b>						
Exterior	0.7					
Interior	0.6					
Door or drawer	0.8					
<b>Opening Depth (mm)</b>						
Door type	1090					
Drawer type	1260					
<b>Maximum loading height of drawer (mm per drawer)</b>						
2 drawers bank	215					
3 drawers bank	115					
1/3 + 2/3 drawers bank	1/3 drawer: 120 2/3 drawer: 343					
<b>Capacity (cu.ft / litres)</b>	6.2 / 178			11.5 / 327		
<b>Power Supply</b>	220V / 50HZ / 1PH					
	13 amp plug					
<b>Power Input - Running (amps) *</b>						
Door type	3.5	2.6	4	3.5	2.6	4.5
Drawer type	3.5	2.6	4	3.5	2.6	4.5
<b>Rating Power (watts) *</b>						
Door type	770	572	880	770	572	990
Drawer type	770	572	880	770	572	990
<b>Compressor (HP)</b>						
Door	1/4	1/2	1/4	1/4	5/8	
2 drawers bank	1/4	1/2	1/4	1/4	5/8	
3 drawers bank	1/4	1/2	1/3	1/3	5/8	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>						
Door	485	1550	485	1844		
2 drawers bank	485	1550	485	1844		
3 drawers bank	485	1550	623	1844		
<b>Refrigerant</b>	R134a		R404a	R134a		R404a
<b>Standard fittings for door type</b>						
PE coated shelves	2		4			
Trayslides (pair)	2		4			

\* 20% increase for 60HZ power supply

# Opal Technical Data

Model	HO3U(J)	MO3U(J)	LO3U(J)	HO4U(J)	MO4U(J)
<b>Temp Range (°C)</b>	+1 / +4	-2 / +2	-19 / -22	+1 / +4	-2 / +2
<b>External Dimension (mm)</b>					
Width	1835			2300	
Depth	670				
Height	850				
<b>Internal Dimension (mm)</b>					
Width	1320			1785	
Depth	560				
Height	570				
<b>Thickness of 304 grade stainless steel (mm)</b>					
Exterior	0.7				
Interior	0.6				
Door or drawer	0.8				
<b>Opening Depth (mm)</b>					
Door type	1090				
Drawer type	1260	N/A		1260	
<b>Maximum loading height of drawer (mm per drawer)</b>					
2 drawers bank	215	N/A		215	
3 drawers bank	115	N/A		115	
1/3 + 2/3 drawers bank	1/3 drawer: 120 2/3 drawer: 343	N/A		1/3 drawer: 120 2/3 drawer: 343	
<b>Capacity (cu.ft / litres)</b>	16.8 / 476			22 / 625	
<b>Power Supply</b>	220V / 50HZ / 1PH				
	13 amp plug				
<b>Power Input - Running (amps) *</b>					
Door type	3.5				4.5
Drawer type	4.5	N/A		4.5	
<b>Rating Power (watts) *</b>					
Door type	770				990
Drawer type	990	N/A		990	
<b>Compressor (HP)</b>					
Door	1/3	3/4		1/2	
2 drawers bank	1/2	N/A		3/4	
3 drawers bank	1/2	N/A		3/4	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>					
Door	623	2229		950	
2 drawers bank	950	N/A		1289	
3 drawers bank	950	N/A		1289	
<b>Refrigerant</b>	R134a		R404a		R134a
<b>Standard fittings for door type</b>					
PE coated shelves	6			8	
Trayslides (pair)	6			8	

\* 20% increase for 60HZ power supply



# Opal Technical Data

Model	HO1R(J)	MO1R(J)	LO1R(J)	HO2R(J)	MO2R(J)	LO2R(J)
<b>Temp Range (°C)</b>	+1 / +4	-2 / +2	-19 / -22	+1 / +4	-2 / +2	-19 / -22
<b>External Dimension (mm)</b>						
Width	680			1145		
Depth				670		
Height				850		
<b>Internal Dimension (mm)</b>						
Width	390			855		
Depth				560		
Height				570		
<b>Thickness of 304 grade stainless steel (mm)</b>						
Exterior				0.7		
Interior				0.6		
Door or drawer				0.8		
<b>Opening Depth (mm)</b>						
Door type				1090		
Drawer type				1260		
<b>Maximum loading height of drawer (mm per drawer)</b>						
2 drawers bank				215		
3 drawers bank				115		
1/3 + 2/3 drawers bank				1/3 drawer: 120 2/3 drawer: 343		
<b>Capacity (cu.ft / litres)</b>						
			6.2 / 178		11.5 / 327	
<b>Power Supply</b>						
220V / 50HZ / 1PH						
13 amp plug						
<b>Power Input - Running (amps) *</b>						
Door type	5	7	5	7	5	7
Drawer type	5	7	5	7	5	7
<b>Rating Power (watts) *</b>						
Door type	1100	1540	1100	1540	1100	1540
Drawer type	1100	1540	1100	1540	1100	1540
<b>Compressor (HP)</b>						
Door	1/3	1/2	1/3	3/4	1/3	3/4
2 drawers bank	1/3	1/2	1/3	3/4	1/3	3/4
3 drawers bank	1/3	1/2	1/3	3/4	1/3	3/4
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>						
Door	623	1539	623	2229	623	2229
2 drawers bank	623	1539	623	2229	623	2229
3 drawers bank	623	1539	623	2229	623	2229
<b>Remote condensing unit with housing (Width x Depth x Height) (mm)</b>						
Door type	530 x 350 x 335				580 x 350 x 335	
Drawer type	530 x 350 x 335				580 x 350 x 335	
<b>Refrigerant Pipe Size (inch)</b>						
Door type - Suction pipe	3/8	1/2	3/8	1/2	3/8	1/2
Door type - Liquid pipe	1/4	3/8	1/4	3/8	1/4	3/8
Drawer type - Suction pipe	3/8			1/2		
Drawer type - Liquid pipe	1/4			3/8		
<b>Maximum pipe length work (m)</b>						
8						
<b>Refrigerant</b>						
R134a		R404a		R134a		R404a
<b>Standard fittings for door type</b>						
PE coated shelves	2			4		
Trayslides (pair)	2			4		




\* 20% increase for 60HZ power supply

# Opal Technical Data

Model	HO3R(J)	MO3R(J)	LO3R(J)	HO4R(J)	MO4R(J)
<b>Temp Range (°C)</b>	+1 / +4	-2 / +2	-19 / -22	+1 / +4	-2 / +2
<b>External Dimension (mm)</b>					
Width	1610		2075		
Depth	670				
Height	850				
<b>Internal Dimension (mm)</b>					
Width	1320		1785		
Depth	560				
Height	570				
<b>Thickness of 304 grade stainless steel (mm)</b>					
Exterior	0.7				
Interior	0.6				
Door or drawer	0.8				
<b>Opening Depth (mm)</b>					
Door type	1090				
Drawer type	1260	N/A	1260		
<b>Maximum loading height of drawer (mm per drawer)</b>					
2 drawers bank	215	N/A	215		
3 drawers bank	115	N/A	115		
1/3 + 2/3 drawers bank	1/3 drawer: 120 2/3 drawer: 343	N/A	1/3 drawer: 120 2/3 drawer: 343		
<b>Capacity (cu.ft / litres)</b>	16.8 / 476		22 / 625		
<b>Power Supply</b>	220V / 50HZ / 1PH 13 amp plug				
<b>Power Input - Running (amps) *</b>					
Door type	5			7	
Drawer type	7	N/A	7		
<b>Rating Power (watts) *</b>					
Door type	1100			1540	
Drawer type	1540	N/A	1540		
<b>Compressor (HP)</b>					
Door	7/16	1/2	3/4		
2 drawers bank	3/4		N/A	3/4	
3 drawers bank	3/4		N/A	3/4	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>					
Door	887	950	2229	1289	
2 drawers bank	1289		N/A	1289	
3 drawers bank	1289		N/A	1289	
<b>Remote condensing unit with housing (Width x Depth x Height) (mm)</b>					
Door type	530 x 350 x 335	580 x 350 x 335		730 x 495 x 400	
Drawer type	730 x 495 x 400		N/A	730 x 495 x 400	
<b>Refrigerant Pipe Size (inch)</b>					
Door type - Suction pipe	1/2	3/8	1/2		
Door type - Liquid pipe	3/8	1/4		3/8	
Drawer type - Suction pipe	1/2		N/A	1/2	
Drawer type - Liquid pipe	3/8		N/A	3/8	
<b>Maximum pipe length work (m)</b>	8				
<b>Refrigerant</b>	R134a		R404a	R134a	
<b>Standard fittings for door type</b>					
PE coated shelves	6			8	
Trayslides (pair)	6			8	

\* 20% increase for 60HZ power supply

# Emerald Product List

E1U(J)-XD	E2U(J)-XDD	E3U(J)-XDDD
		
E1U(J)-XN	E2U(J)-XNN	E3U(J)-XNNN
		
E1U(J)-XT	E2U(J)-XTT	E3U(J)-XTTT
		
E1U(J)-XW	E2U(J)-XWW	E3U(J)-XWWW
		

# Emerald Technical Data

Model	HE1U(J)	ME1U(J)	LE1U(J)	HE2U(J)	ME2U(J)	LE2U(J)	HE3U(J)	ME3U(J)	LE3U(J)
<b>Temp Range (°C)</b>	+1 / +4	-2 / +2	-19 / -22	+1 / +4	-2 / +2	-19 / -22	+1 / +4	-2 / +2	-19 / -22
<b>External Dimension (mm)</b>									
Width	1102		1765			2426			
Depth	770								
Height	850								
<b>Internal Dimension (mm)</b>									
Width	587		1250			1911			
Depth	660								
Height	570								
<b>Thickness of 304 grade stainless steel (mm)</b>									
Exterior	0.7								
Interior	0.6								
Door or drawer	0.8								
<b>Opening Depth (mm)</b>									
Door type	1387								
Drawer type	1460					N/A			
<b>Maximum loading height of drawer (mm per drawer)</b>									
2 drawers bank	215					N/A			
3 drawers bank	115		N/A			115		N/A	
1/3 + 2/3 drawers bank	1/3 drawer: 120 2/3 drawer: 343					N/A			
<b>Capacity (cu.ft / litres)</b>	10.2 / 290		19.3 / 547			28.3 / 803			
<b>Power Supply</b>	220V / 50HZ / 1PH					13 amp plug			
<b>Power Input - Running (amps) *</b>									
Door type	3	4	3	3.5	4	3.5	4.5	4.5	
Drawer type	3	4	3	3.5	4	3.5	4.5	N/A	
<b>Rating Power (watts) *</b>									
Door type	660	880	660	770	880	770	990	990	
Drawer type	660	880	660	770	880	770	990	N/A	
<b>Compressor (HP)</b>									
Door	1/4	1/2	1/4	5/8	1/2	3/4			
2 drawers bank	1/4	1/2	1/4	5/8	1/2	N/A			
3 drawers bank	1/4	1/2	1/4	N/A	1/2	N/A			
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>									
Door	485	1550	485	1844	950	1289			
2 drawers bank	485	1550	485	1844	950	N/A			
3 drawers bank	485	1550	623	N/A	950	N/A			
<b>Refrigerant</b>	R134a	R404a	R134a	R404a	R134a	R404a			
<b>Standard fittings for door type</b>									
PE coated shelves	2		4			6			
Trayslides (pair)	2		4			6			

\* 20% increase for 60HZ power supply

# Emerald Technical Data

Model	HE1R(J)	ME1R(J)	LE1R(J)	HE2R(J)	ME2R(J)	LE2R(J)	HE3R(J)	ME3R(J)	LE3R(J)
<b>Temp Range (°C)</b>	+1 / +4	-2 / +2	-19 / -22	+1 / +4	-2 / +2	-19 / -22	+1 / +4	-2 / +2	-19 / -22
<b>External Dimension (mm)</b>									
Width	877			1540			2201		
Depth				770					
Height				850					
<b>Internal Dimension (mm)</b>									
Width	587			1250			1911		
Depth				660					
Height				570					
<b>Thickness of 304 grade stainless steel (mm)</b>									
Exterior				0.7					
Interior				0.6					
Door or drawer				0.8					
<b>Opening Depth (mm)</b>									
Door type				1387					
Drawer type				1460			N/A		
<b>Maximum loading height of drawer (mm per drawer)</b>									
2 drawers bank				215			N/A		
3 drawers bank	115						N/A	115	
1/3 + 2/3 drawers bank				1/3 drawer: 120 2/3 drawer: 343			N/A		
<b>Capacity (cu.ft / litres)</b>	10.2 / 290			19.3 / 547			28.3 / 803		
<b>Power Supply</b>				220V / 50HZ / 1PH					
				13 amp plug					
<b>Power Input - Running (amps) *</b>									
Door type	5	7	5				7		
Drawer type	5	7	5				7	N/A	
<b>Rating Power (watts) *</b>									
Door type	1100	1540	1100				1540		
Drawer type	1100	1540	1100				1540	N/A	
<b>Compressor (HP)</b>									
Door	1/3	5/8	1/3				3/4	1	
2 drawers bank	1/3	5/8	1/3				3/4	N/A	
3 drawers bank	1/3	5/8	1/3	N/A	3/4			N/A	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>									
Door	623	1844	623	2229	1289	3389			
2 drawers bank	623	1844	623	2229	1289	N/A			
3 drawers bank	623	1844	623	N/A	1289	N/A			
<b>Remote condensing unit with housing (Width x Depth x Height) (mm)</b>									
Door type	530 x 350 x 335			580 x 350 x 335			730 x 495 x 420		
Drawer type	530 x 350 x 335			580 x 350 x 335					
<b>Refrigerant Pipe Size (inch)</b>									
Door type - Suction pipe	3/8			1/2					
Door type - Liquid pipe	1/4			3/8			1/4		
Drawer type - Suction pipe	3/8			1/2			N/A		
Drawer type - Liquid pipe	1/4			3/8			N/A		
<b>Maximum pipe length work (m)</b>				8					
<b>Refrigerant</b>	R134a	R404a	R134a	R404a	R134a	R404a			
<b>Standard fittings for door type</b>									
PE coated shelves	2			4			6		
Trayslides (pair)	2			4			6		

\* 20% increase for 60HZ power supply

# Bakery Product List



**B1U(J)-XD**



**B2U(J)-XDD**



**B3U(J)-XDDD**





# Bakery Technical Data

Model	HB1U(J)	HB2U(J)	HB3U(J)	HB1R(J)	HB2R(J)	HB3R(J)
<b>Temp Range (°C)</b>	+1 / +4	+1 / +4	+1 / +4	+1 / +4	+1 / +4	+1 / +4
<b>External Dimension (mm)</b>						
Width	970	1500	2030	745	1275	1805
Depth	760					
Height	850					
<b>Internal Dimension (mm)</b>						
Width	455	985	1513	455	985	1513
Depth	650					
Height	570					
<b>Thickness of 304 grade stainless steel (mm)</b>						
Exterior	0.7					
Interior	0.6					
Door	0.8					
<b>Opening Depth (mm)</b>	1243					
<b>Capacity (cu.ft / litres)</b>	8.1 / 230	15.1 / 428	22 / 625	8.1 / 230	15.1 / 428	22 / 625
<b>Power Supply</b>	220V / 50HZ / 1PH					
	13 amp plug					
<b>Power Input - Running (amps) *</b>	2.5	4.5	3.5	7		
<b>Rating Power (watts) *</b>	550	990	770	1540		
<b>Compressor (HP)</b>	1/4	1/2	1/4	1/3	1/2	
<b>Heat Rejection (watts) (Evaporating at -10°C at 32°C ambient)</b>	485	950	485	623	950	
<b>Remote condensing unit with housing (Width x Depth x Height) (mm)</b>	N/A		530 x 350 x 335		580 x 350 x 335	
<b>Refrigerant Pipe Size (inch)</b>						
Suction pipe	N/A			3/8		
Pressure pipe	N/A			1/4		
<b>Maximum pipe length work (m)</b>	N/A			8		
<b>Refrigerant</b>	R134a					
<b>Standard fittings</b>						
PE coated shelves	2	4	6	2	4	6
Trayslides (pair)	2	4	6	2	4	6

\* 20% increase for 60HZ power supply

Size should not limit the creativity.

## Small foodprint with the innovative designs

refrigeration equipment can also serve as  
undercounter or counter units to provide infinite  
possibility to the compact kitchen design.



# Varitemp Drawer Key Features

Adjustable Chill-freeze temperature range and effective drawer design with durable worktop provide the greatest flexibility with its small footprint



01. Chill-freeze storage temperature range covered  $-22^{\circ}\text{C}$  to  $+4^{\circ}\text{C}$  and can be easily adjusted to be a chiller or freezer
02. Special cooling system configuration maintains the small footprint especially for compact kitchen design
03. Designed for serving as undercounter units or counter units with tough, durable and heat resistant worktop
04. Easy servicing condensing unit and evaporator
05. Fully extendable work out drawer fitted as standard for easy accessing and better organising the food products
06. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
07. Anti-condensation drawer mullion heaters
08. Removable balloon type magnetic drawer gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
09. 75Hmm heavy duty, non-marking swivel and braked castors for easy positioning (50Hmm for stacking model)
10. Forced air refrigeration system ensures effective air circulation from the top
11. Clear digital display is designed for easy operation, it also features with built-in alert and fail safe run facility
12. Imported, durable and energy-efficient compressor
13. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
14. Accurate helium leak detection system ensures the quality of the entire refrigeration system
15. Automatic defrost ensures the evaporator working to its optimum performance
16. Automatically vaporises defrost water, drainage is not required
17. Designed and engineered to operate up to  $43^{\circ}\text{C}$  ambient
18. Environmental-friendly CFC-free refrigerant (R134a)
19. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

# Varitemp Drawer

## Specification

- Accommodates 2/1 GN size
- Foodsafe 304 grade stainless steel exterior and interior
- 1.2mm thick durable 304 grade stainless steel table top
- Galvanised steel exterior back and base
- Fitted with cylindrical lock

## Options

1. 304 grade stainless steel exterior back / base
2. Right-hand-side condensing unit
3. Adjustable legs in lieu of castors
4. 220V / 60HZ / 1PH

## Product List

UBC-VT-21-2(150H)	UBC-VT-21-1(150H)	UBC-VT-21-1(200H)
		

# Varitemp Drawer Technical Data

Model	UBC-VT-21-1(150H)	UBC-VT-21-2(150H)	UBC-VT-21-1(200H)
<b>Temp Range (°C)</b>	-22 / +4	-22 / +4	-22 / +4
<b>External Dimension (mm)</b>			
Width	1090		
Depth	670	670 + 50 (rear bracket)	670
Height (include castors)	470	840	520
<b>Opening Depth (mm)</b>	1275		
<b>Capacity (cu.ft / litres)</b>	1 (150Hmm)	2 (150Hmm)	1 (200Hmm)
<b>Power Supply</b>	220V / 50HZ / 1PH		
	13 amp plug	13 amp plug x 2	13 amp plug
<b>Power Input - Running (amps) *</b>	4.5	4.5 x 2	4.5
<b>Rating Power (watts) *</b>	990	990 x 2	990
<b>Compressor (HP)</b>	1/6	1/6 x 2	1/6
<b>Heat Rejection (watts) (Evaporating at -10°C at 32°C ambient)</b>	826	826 x 2	826
<b>Refrigerant</b>	R404a		

\* 20% increase for 60HZ power supply

# Aztra Key Features

Space saving design allows compact refrigeration equipment set up



- 01. 5UC model is designed for under counter installation with lower height (840mm)
- 02. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
- 03. Adjustable racking system allows flexible storage
- 04. Anti-condensation door mullion heaters fitted for freezer models
- 05. Removable anti-tilt trayslides to prevent tipping
- 06. Self-closing doors minimise cool air loss and reduce energy consumption
- 07. Over 90° door opening allows easy loading and stock checking
- 08. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
- 09. 20mm levelling feet at front to ensure stability on an uneven floor and 15mm castors at rear
- 10. Forced air refrigeration system ensures effective air circulation
- 11. Imported, durable and energy-efficient compressor
- 12. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
- 13. Accurate helium leak detection system ensures the quality of the entire refrigeration system
- 14. Automatic defrost ensures the evaporator working to its optimum performance
- 15. Automatically vaporises defrost water, drainage is not required
- 16. Designed and engineered to operate up to 43°C ambient
- 17. Environmental-friendly CFC-free refrigerant (R134a or R404a)
- 18. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.



# Aztra

## Specification

- Accommodates 1/1 GN size
- Foodsafe 304 grade stainless steel exterior and interior
- Fitted with 1.2mm thick durable 304 grade stainless steel table top \*
- Galvanised steel exterior back and base

\* Available for 5CT(J), 10CT(J) only

## Options

1. 304 grade stainless steel exterior back / base
2. 2 drawers bank #
3. Cylindrical lock
4. Lock plate
5. Internal LED for door type
6. Additional shelving / trayslides for door type
7. 220V / 60HZ / 1PH

# Available for 5UC(J) only



## Product List

5UC(J)	5CT(J)	10CT(J)

# Aztra Technical Data

Model	H5UC(J)	L5UC(J)	H5CT(J)	L5CT(J)	H10CT(J)	L10CT(J)
<b>Temp Range (°C)</b>	+1 / +4	-19 / -22	+1 / +4	-19 / -22	+1 / +4	-19 / -22
<b>External Dimension (mm)</b>						
Width	650		445		865	
Depth (including 50mm rear bracket)	659			784		
Height	840			865		
<b>Internal Dimension (mm)</b>						
Width	577		375		792	
Depth	388			528		
Height	464			460		
<b>Thickness of 304 grade stainless steel (mm)</b>						
Exterior			0.7			
Interior			0.6			
Door			0.8			
<b>Opening Depth (mm)</b>						
Door type (including 50mm rear bracket)	1262		1175		1160	
Drawer type (including 50mm rear bracket)	1050			N/A		
<b>Maximum loading height of drawer (mm per drawer)</b>						
2 drawers bank	160			N/A		
<b>Capacity (cu.ft / litres)</b>	4.6 / 132		3.8 / 109		8.1 / 231	
<b>Power Supply</b>	220V / 50HZ / 1PH					
	13 amp plug					
<b>Power Input - Running (amps) *</b>						
Door type	2	4	2.15		2.23	2.5
Drawer type	2	4		N/A		
<b>Rating Power (watts) *</b>						
Door type	440	880	473		491	550
Drawer type	440	880		N/A		
<b>Compressor (HP)</b>						
Door	1/5	1/2	1/5	1/2	1/4	1/2
2 drawers bank	1/5	1/2		N/A		
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>						
Door	287	1550	287	1550	485	1550
2 drawers bank	287	1550		N/A		
<b>Refrigerant</b>	R134a	R404a	R134a	R404a	R134a	R404a
<b>Standard fittings for door type</b>						
PE coated shelves		2			4	
Trayslides (pair)		2			4	

\* 20% increase for 60HZ power supply

# Under Broiler Key Features

Space saving, low height refrigerated counter designed for accommodating chargrills and griddles



01. Fully extendable work out drawer fitted as standard for easy accessing and better organising the food products
02. Removable cassette type condensing unit and evaporator for easy servicing with zero down time
03. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
04. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
05. 75Hmm heavy duty, non-marking swivel and braked castors for easy positioning
06. Forced air refrigeration system ensures effective air circulation
07. CoolSmart controller with clear digital display is designed for easy operation
08. Imported, durable and energy-efficient compressor
09. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
10. Accurate helium leak detection system ensures the quality of the entire refrigeration system
11. Automatic defrost ensures the evaporator working to its optimum performance
12. Automatically vaporises defrost water, drainage is not required
13. Designed and engineered to operate up to 43°C ambient
14. Environmental-friendly CFC-free refrigerant (R134a)
15. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

# Under Broiler

## Specification

- Accommodates 1/1 GN size or 2/1 GN size (UBC7(J) and UBC20(J) only)
- Foodsafe 304 grade stainless steel exterior and interior
- 1.2mm thick durable 304 grade stainless steel table top
- Galvanised steel exterior back and base

## Options

1. 304 grade stainless steel exterior back / base
2. Cylindrical lock
3. Lock plate
4. Right-hand-side condensing unit
5. Remote type condensing unit
6. Adjustable legs in lieu of castors
7. 220V / 60HZ / 1PH



## Product List

UBC2(J)	UBC4(J)	UBC6(J)
		
UBC7(J)		UBC20(J)
		

# Under Broiler Technical Data

Model	UBC2(J)	UBC4(J)	UBC6(J)	UBC7(J)	UBC20(J)
<b>Temp Range (°C)</b>	+1 / +4	+1 / +4	+1 / +4	+1 / +4	+1 / +4
<b>External Dimension (mm)</b>					
Width	1095	1552	2010	1300	1962
Depth	670			782	
Height	546				
<b>Internal Dimension (mm)</b>					
Width	468	925	1302	590	1253
Depth	570			682	
Height	345				
<b>Thickness of 304 grade stainless steel (mm)</b>					
Exterior	0.7				
Interior	0.6				
Door or drawer	0.8				
<b>Opening Depth (mm)</b>	1270			1480	
<b>Maximum loading height of drawer (mm per drawer)</b>	95				
<b>Capacity (cu.ft / litres)</b>	4.1 / 118	7.3 / 208	10.5 / 298	6.7 / 190	12.2 / 346
<b>Power Supply</b>	220V / 50HZ / 1PH				
	13 amp plug				
<b>Power Input - Running (amps) *</b>	3.5				
<b>Rating Power (watts) *</b>	770				
<b>Compressor (HP)</b>	1/4		1/3		1/4
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	485		623		485
<b>Refrigerant</b>	R134a				

\* 20% increase for 60HZ power supply

Food preparation

# Counters and wells in a variety of formats,

combining gastronorm storage with spacious preparation area, raising operation effectiveness along with food safety secured.





# Onyx Key Features

Innovative counter with raised pan holder - ideal for quick and easy food preparation



01. Unique airflow design with protective air curtain to ensure a 4°C food storage temperature of ingredients in raised pan holder



02. The working table top is sufficient for a 15" pizza dough

03. Removable, easy to clean crumb tray fitted



04. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)

05. Adjustable racking system allows flexible storage

06. Anti-condensation door mullion heaters

07. Removable anti-tilt trayslides to prevent tipping

08. Self-closing doors minimise cool air loss and reduce energy consumption




09. Over 90° door opening allows easy loading and stock checking

10. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps

- 11. 135Hmm heavy duty, non-marking swivel and braked castors for easy positioning
- 12. Forced air refrigeration system ensures effective air circulation
- 13. Imported, durable and energy-efficient compressor
- 14. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
- 15. Accurate helium leak detection system ensures the quality of the entire refrigeration system
- 16. Automatic defrost ensures the evaporator working to its optimum performance
- 17. Automatically vaporises defrost water, drainage is not required
- 18. Designed and engineered to operate up to 43°C ambient
- 19. Environmental-friendly CFC-free refrigerant (R134a)
- 20. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

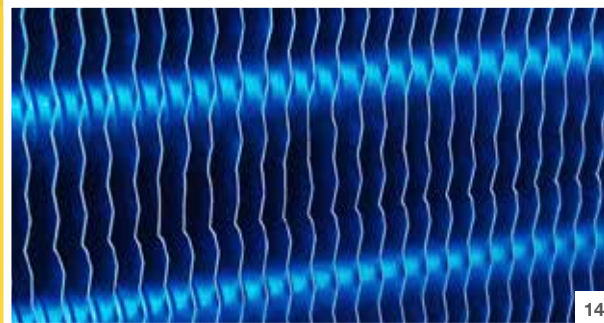

# Onyx

## Specification

- Accommodates 1/1 GN size in under counter
- Accommodates 1/3 GN size (150mm depth) in raised pan holder
- Foodsafe 304 grade stainless steel exterior and interior
- Fitted with 304 grade stainless steel lift off cover
- 1.2mm thick durable 304 grade stainless steel table top
- Galvanised steel exterior back and base
- Fitted with cylindrical lock for door(s)



## Options

1. 304 grade stainless steel exterior back / base
2. 2 drawers bank (Non GN size)
3. Cylindrical lock for drawer(s)
4. Lock plate
5. Internal LED for door type
6. Adjustable legs in lieu of castors
7. Additional shelving / trayslides for door type
8. 220V / 60HZ / 1PH



## Product List

CPC3(J)	CPC4(J)	CPC5(J)
		

# Onyx Technical Data

Model	CPC3(J)	CPC4(J)	CPC5(J)
<b>Temp Range (°C)</b>			
Under counter	+1 / +4	+1 / +4	+1 / +4
Raised pan holder with cover	+4	+4	+4
<b>External Dimension (mm)</b>			
Width	1420	1885	2350
Depth (including 50mm rear bracket)	909		
Height	1100		
<b>Internal Dimension (mm)</b>			
Width	1320	1785	2250
Depth	575		
Height	605		
<b>Thickness of 304 grade stainless steel (mm)</b>			
Exterior	0.7		
Interior	0.6		
Door or drawer	0.8		
<b>Opening Depth (mm)</b>			
Door type (including 50mm rear bracket)	1330		
Drawer type (including 50mm rear bracket)	1400		
<b>Maximum loading height of drawer (mm per drawer)</b>			
2 drawers bank	225		
<b>Capacity</b>			
Under counter (cu.ft / litres)	22.6 / 642	30.6 / 868	38.6 / 1094
Raised pan holder (1/3 GN pan)	7	10	12
<b>Power Supply</b>		220V / 50HZ / 1PH	
		13 amp plug	
<b>Power Input - Running (amps) *</b>			
Door or drawer type	5.7	7.5	8
<b>Rating Power (watts) *</b>			
	1254	1650	1760
<b>Compressor (HP)</b>			
Door or 2 drawers bank	3/4	1	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>			
Door or 2 drawers bank	1289	1816	
<b>Refrigerant</b>		R134a	
<b>Standard fittings</b>			
PE coated shelves #	6	8	10
Trayslides (pair) #	6	8	10
Cover	2		3
GN pan bridging bar	6	9	11

\* 20% increase for 60HZ power supply

# Not applicable for drawer type

# Jade Preparation Key Features


Front-vented refrigeration counter design with raised pan holder for quick and easy food preparation



01. Removable cassette type condensing unit and evaporator for easy servicing with zero down time
02. Unique airflow design with protective air curtain in raised pan holder to ensure food safety
03. The working table top is sufficient for a 12" pizza dough
04. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
05. Adjustable racking system allows flexible storage
06. Anti-condensation door mullion heaters
07. Removable anti-tilt trayslides to prevent tipping
08. Self-closing doors minimise cool air loss and reduce energy consumption
09. Over 90° door opening allows easy loading and stock checking
10. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps



11. 135Hmm heavy duty, non-marking swivel and braked castors for easy positioning
12. Forced air refrigeration system ensures effective air circulation
13. CoolSmart controller with clear digital display is designed for easy operation
14. Imported, durable and energy-efficient compressor
15. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
16. Accurate helium leak detection system ensures the quality of the entire refrigeration system
17. Automatic defrost ensures the evaporator working to its optimum performance
18. Automatically vaporises defrost water, drainage is not required
19. Designed and engineered to operate up to 43°C ambient
20. Environmental-friendly CFC-free refrigerant (R134a)
21. HACCP compliant

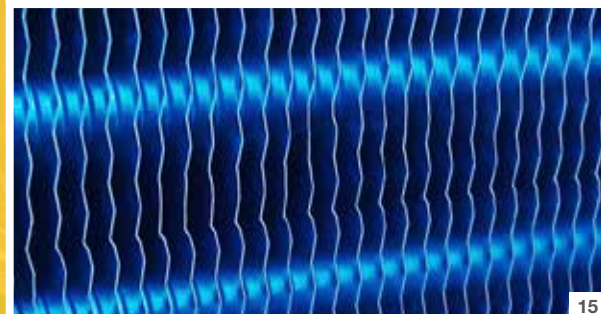

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.



# Jade Preparation

---

## Specification

- Accommodates 2/1 GN size in under counter
  - Accommodates 1/3 GN size (150mm depth) in raised pan holder
  - Foodsafe 304 grade stainless steel exterior and interior
  - Acrylic sliding cover for raised pan holder
  - 1.2mm thick durable 304 grade stainless steel table top
  - Galvanised steel exterior back and base
  - Fitted with cylindrical lock for door(s)
- 

## Options

1. 304 grade stainless steel exterior back / base
2. Lock plate
3. Internal LED
4. Right-hand-side condensing unit
5. Adjustable legs in lieu of castors
6. Front/ side skirting for optional legs
7. Additional shelving / trayslides
8. 220V / 60HZ / 1PH



## Product List

**HJ2PCA(J)**



# Jade Preparation Technical Data

<b>Model</b>	HJ2PCA(J)
<b>Temp Range (°C)</b>	
Under counter	+1 / +4
Raised pan holder with cover	+4
<b>External Dimension (mm)</b>	
Width	1765
Depth	820
Height	1055
<b>Internal Dimension (mm)</b>	
Width	1250
Depth	698
Height	595
<b>Thickness of 304 grade stainless steel (mm)</b>	
Exterior	0.7
Interior	0.6
Door	0.8
<b>Opening Depth (mm)</b>	1424
<b>Capacity</b>	
Under counter (cu.ft / litres)	26 / 737
Raised pan holder (1/3 GN pan)	9
<b>Power Supply</b>	220V / 50HZ / 1PH 13 amp plug
<b>Power Input - Running (amps) *</b>	3.5
<b>Rating Power (watts) *</b>	770
<b>Compressor (HP)</b>	1/2
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	950
<b>Refrigerant</b>	R134a
<b>Standard fittings</b>	
PE coated shelves	4
Trayslides (pair)	4
Acrylic cover	3
GN pan bridging bar	8

\* 20% increase for 60HZ power supply

# Aztra Salad Key Features

Space saving design with saladette wells and extended work-top for food preparation



01. Fitted with 91mm overhang white polypropylene worktop to maximise preparation area
02. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
03. Adjustable racking system allows flexible storage
04. Removable anti-tilt trayslides to prevent tipping
05. Self-closing doors minimise cool air loss and reduce energy consumption
06. Over 90° door opening allows easy loading and stock checking
07. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
08. 20mm levelling feet at front to ensure stability on an uneven floor and 15mm castors at rear
09. Forced air refrigeration system ensures effective air circulation
10. Imported, durable and energy-efficient compressor
11. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
12. Accurate helium leak detection system ensures the quality of the entire refrigeration system
13. Automatic defrost ensures the evaporator working to its optimum performance
14. Automatically vaporises defrost water, drainage is not required
15. Designed and engineered to operate up to 43°C ambient
16. Environmental-friendly CFC-free refrigerant (R134a)
17. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

# Aztra Salad

## Specification

- Accommodates 1/1 GN size for SU10CT(J) and 505 x 530mm size for SU15CT(J) in under counter
- Accommodates 1/3 GN size (100mm depth) in saladette well
- Foodsafe 304 grade stainless steel exterior and interior
- 1.2mm thick durable 304 grade stainless steel table top
- Galvanised steel exterior back and base

## Options

1. 304 grade stainless steel exterior back / base
2. 2 drawers bank
3. Cylindrical lock
4. Lock plate
5. Internal LED for door type
6. Additional shelving / trayslides for door type
7. 220V / 60HZ / 1PH



## Product List

SU10CT(J)



SU15CT(J)



# Aztra Salad Technical Data

Model	SU10CT(J)	SU15CT(J)
<b>Temp Range (°C)</b>		
Under counter	+1 / +4	+1 / +4
Saladette Well with cover	+5 / +8	+5 / +8
<b>External Dimension (mm)</b>		
Width	865	1226
Depth (including 91mm overhang & 50mm rear bracket)	875	
Height	865	
<b>Internal Dimension (mm)</b>		
Width	795	1156
Depth	528	
Height	460	
<b>Thickness of 304 grade stainless steel (mm)</b>		
Width	0.7	
Depth	0.6	
Height	0.8	
<b>Opening Depth (mm)</b>		
Door type (including 50mm rear bracket)	1168	1350
Drawer type (including 50mm rear bracket)	1225	
<b>Maximum loading height of drawer (mm per drawer)</b>		
2 drawers bank	150	
<b>Capacity</b>		
Under counter (cu.ft / litres)	8.7 / 247	12.7 / 360
Saladette well (1/3 GN Pan)	4	6
<b>Power Supply</b>		
	220V / 50HZ / 1PH	
	13 amp plug	
<b>Power Input - Running (amps) *</b>		
Door or drawer type	2.23	2.4
<b>Rating Power (watts) *</b>		
Door or drawer type	491	528
<b>Compressor (HP)</b>		
Door or 2 drawers bank	1/4	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>		
Door or 2 drawers bank	485	
<b>Refrigerant</b>		
	R134a	
<b>Standard fittings</b>		
PE coated shelves #	2	4
Trayslides (pair) #	2	4
GN pan bridging bar	3	5

\* 20% increase for 60HZ power supply

# Not applicable for drawer type

# Thermowell Key Features

Table top food preparation well designed to ensure a flexible workflow planning



02

01. Removable condensing unit cover for easy servicing and maintenance
02. Hinged lid designed to stay open for easy access and the ease of cleaning
03. Fitted with digital thermometer for clear temperature display
04. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
05. Fitted with rubber feet offering non-slip placement
06. Imported, durable and energy-efficient compressor
07. Accurate helium leak detection system ensures the quality of the entire refrigeration system
08. Designed and engineered to operate up to 32°C ambient
09. Environmental-friendly CFC-free refrigerant (R134a)
10. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.



# Thermowell

---

## Specification

- Accommodates 1/3 GN size (100mm depth)
  - Foodsafe 304 grade stainless steel exterior (including back) and interior
  - Galvanised steel exterior base
  - Fitted with adjustable thermostat
- 

## Options

1. 304 grade stainless steel exterior base
2. Air-blown system \*
3. Acrylic sliding cover
4. Glass hood in lieu of hinged lid
5. Wall / counter mounting kit
6. GN pan bridging bar
7. 220V / 60HZ / 1PH

\* Dimension and capacity are different, please check with Williams

---

## Product List

TW9	TW15	TW18
		

---

# Thermowell Technical Data

Model	TW9	TW15	TW18
<b>Temp Range (°C)</b>	+4 / +8	+4 / +8	+4 / +8
<b>External Dimension (mm)</b>			
Width	980	1510	1862
Depth	375		
Height	241		
<b>Internal Dimension (mm)</b>			
Width	685	1212	1565
Depth	305		
Height	105		
<b>Thickness of 304 grade stainless steel (mm)</b>			
Exterior	0.7		
Interior	0.6		
Lid	0.9		
<b>Opening Height (mm)</b>	575		
<b>Capacity (1/3 GN pan)</b>	4	7	9
<b>Power Supply</b>	220V / 50HZ / 1PH		
	13 amp plug		
<b>Power Input - Running (amps) *</b>	1.25		
<b>Rating Power (watts) *</b>	275		
<b>Compressor (HP)</b>	1/6		
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	204		
<b>Refrigerant</b>	R134a		

\* 20% increase for 60HZ power supply




Williams  
Professional Refrigeration

# Beverage Counter Series

Drinks display and storage are essential to catering,  
Williams provides ranges of equipment  
to facilitate your business

# Bottle Cooler Key Features

Designed for stylish, effective storage and display of bottles and cans for easy customer selection

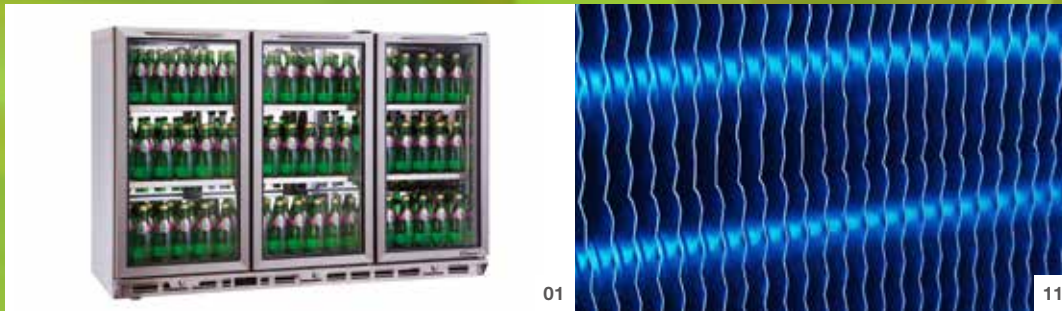

01. Fitted with anti-condensation double glazed Argon gas glass door with aluminium alloy frame
02. Bright low energy LED with on / off switch for excellent product display and easy customer selection
03. Engineered with hidden condensing unit to fit with interior design and minimising the requested installation space
04. Fully adjustable perforated 304 grade stainless steel shelves. Accomodates a vertical stacking capacity of three or six levels of 10" bottles
05. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
06. Removable magnetic door gasket with air release points provides an excellent seal to prevent heat ingress
07. BC1, BC2 and BC3: 10Hmm levelling feet at front to ensure stability on an uneven floor and 15Hmm castors at rear
08. BC95 and BC200: 10Hmm levelling feet to ensure stability on an uneven floor
09. Forced air refrigeration system ensures effective air circulation
10. Imported, durable and energy-efficient compressor
11. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
12. Accurate helium leak detection system ensures the quality of the entire refrigeration system
13. Automatic defrost ensures the evaporator working to its optimum performance
14. Automatically vaporises defrost water, drainage is not required
15. Designed and engineered to operate up to 32°C ambient
16. Environmental-friendly CFC-free refrigerant (R134a)
17. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

# Bottle Cooler


## Specification

- Foodsafe 304 grade stainless steel exterior and 304 grade BA mirror stainless steel interior
- Galvanised steel exterior back and base
- Fitted with cylindrical lock

## Options

1. 304 grade stainless steel exterior back / base
2. Black colour bond exterior / back
3. 15mm thick table top for hidden the door hinge screw \*
4. 304 grade stainless steel door
5. Left-hand-side door hinge
6. Additional shelving / shelf supporters
7. 220V / 60HZ / 1PH

\* Available for BC1SS, BC2SS and BC3SS only





# Bottle Cooler Product List

**BC1SS-U**                      **BC2SS-U**                      **BC3SS-U**



**BC95SS**                      **BC200SS**



# Bottle Cooler Technical Data

Model	BC1SS-U	BC2SS-U	BC3SS-U	BC95SS	BC200SS
<b>Temp Range (°C)</b>	+4 / +10	+4 / +10	+4 / +10	+4 / +10	+4 / +10
<b>External Dimension (mm)</b>					
Width	600	900	1352	645	1290
Depth (including 27mm rear bracket)	530			635	
Height	800			1770	
<b>Internal Dimension (mm)</b>					
Width	530	830	1310	545	1190
Depth	378			510	
Height	650			1554	
<b>Thickness of 304 grade stainless steel (mm)</b>					
Exterior	0.7				
Interior	0.7				
<b>Opening Depth</b>	1073	923		1254	
<b>Capacity (cu.ft / litres)</b>	4.5 / 130	7.2 / 204	11.1 / 315	14.5 / 412	31.7 / 899
<b>Capacity (cans @ 330ml)</b>	122	204	309	266	558
<b>Power Supply</b>	220V / 50HZ / 1PH				
	13 amp plug				
<b>Power Input - Running (amps) *</b>	2		3.5	2	2.28
<b>Rating Power (watts) *</b>	440		770	440	502
<b>Compressor (HP)</b>	1/5		1/4	1/5	1/4
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	287		485	287	485
<b>Refrigerant</b>	R134a				
<b>Standard fittings</b>					
Stainless steel perforated shelves	2		6		12
Shelf supporters	8	10	24	48	

\* 20% increase for 60HZ power supply

# Wall Mounted Bottle Cooler

---

## Specification

- Foodsafe 304 grade stainless steel exterior ( including base) and 304 grade BA mirror stainless steel interior
  - Galvanised steel exterior back
  - Fitted with cylindrical lock
  - With wall mount bracket
- 

## Options

1. 304 grade stainless steel exterior back
  2. Black colour bond exterior / back
  3. 304 grade stainless steel door
  4. Left-hand-side door hinge
  5. Additional shelving / shelf supporters
  6. 220V / 60HZ / 1PH
- 

## Product List



# Wall Mounted BC Technical Data

Model	BCWM-1	BCWM-2	BCWM-3
<b>Temp Range (°C)</b>	+4 / +10	+4 / +10	+4 / +10
<b>External Dimension (mm)</b>			
Width	600	900	1352
Depth	450		
Height	835		
<b>Internal Dimension (mm)</b>			
Width	530	830	1275
Depth	310		
Height	490		
<b>Thickness of 304 grade stainless steel (mm)</b>			
Exterior	0.7		
Interior	0.7		
<b>Opening Depth</b>	1005	860	
<b>Capacity (cu.ft / litres)</b>	3.5 / 100	5.5 / 155	8.2 / 230
<b>Capacity (cans @ 330ml)</b>	96	120	180
<b>Power Supply</b>	220V / 50HZ / 1PH		
	13 amp plug		
<b>Power Input - Running (amps) *</b>	2		3.5
<b>Rating Power (watts) *</b>	440		770
<b>Compressor (HP)</b>	1/5		1/4
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	287		485
<b>Refrigerant</b>	R134a		
<b>Standard fittings</b>			
Stainless steel perforated shelves	2		6
Shelf supporters	8	12	24

\* 20% increase for 60HZ power supply

# Bottle Well Key Features

Top sliding lid provides quick and easy access for restocking



01. Removable lid for easy access of restocking and cleaning
02. Sliding lid fitted with lock for overnight security
03. Easy access to removable drip tray for emptying the drainage after cleaning interior\*
04. Built in bottle opener with easy access to remove and empty catcher \*
05. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
06. 15Hmm levelling feet to ensure stability on an uneven floor
07. Forced air-cooled refrigeration system for BW models and static-cooled refrigeration system for BFW models to ensure effective cool air distribution
08. Imported, durable and energy-efficient compressor
09. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties \*
10. Accurate helium leak detection system ensures the quality of the entire refrigeration system
11. Automatic defrost ensures the evaporator working to its optimum performance \*
12. Automatically vaporises defrost water \*
13. Designed and engineered to operate up to 32°C ambient
14. Environmental-friendly CFC-free refrigerant (R134a or R404a)
15. HACCP compliant

\* Available for BW600 and BW900 only

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

# Bottle Well

## Specification

- Foodsafe 304 grade stainless steel exterior and interior
- Galvanised steel exterior back and base
- Fitted with PE coated wire dividers \*
- BFW600 and BFW900 fitted with 19ømm drainage for maximum cleanliness

\* Available for BW600 and BW900 only

## Options

1. 304 grade stainless steel exterior back / base
2. 220V / 60HZ/ 1PH

## Product List





# Bottle Well Technical Data

Model	BW600	BW900	BFW600	BFW900
<b>Temp Range (°C)</b>	+4 / +10	+4 / +10	-19 / -22	-19 / -22
<b>External Dimension (mm)</b>				
Width	608	908	608	908
Depth (excluding bottle opener)	634			
Height	903			
<b>Internal Dimension (mm)</b>				
Width	525	825	458	758
Depth	485			
Height	555		485	
<b>Thickness of 304 grade stainless steel (mm)</b>				
Exterior	0.7			
Interior	0.6			
Door	0.8			
<b>Capacity (cu.ft / litres)</b>	5.6 / 160	8.9 / 252	3.8 / 110	6.4 / 183
<b>Capacity (cans @ 330ml)</b>	240	384	N/A	
<b>Power Supply</b>	220V / 50HZ / 1PH			
	13 amp plug			
<b>Power Input - Running (amps) *</b>	1.75	2		2.5
<b>Rating Power (watts) *</b>	385	440		550
<b>Compressor (HP)</b>	1/5		3/8	1/2
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	287		982	1550
<b>Refrigerant</b>	R134a			R404a
<b>Standard fittings</b>				
PE coated wire dividers	2		N/A	

\* 20% increase for 60HZ power supply

# Glass Chiller Key Features

Designed for rapid chilling glasses straight from the washer



- 01. Spring loaded lifting mechanism which provide easy access for users
- 02. Fitted with double glazed Argon gas glass door to avoid condensing water
- 03. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
- 04. Anti-condensation door mullion heaters
- 05. Self-closing doors minimise cool air loss and reduce energy consumption
- 06. Over 90° door opening allows easy loading and stock checking
- 07. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
- 08. 150Hmm adjustable legs to ensure stability on an uneven floor
- 09. Forced air refrigeration system ensures effective air circulation
- 10. Imported, durable and energy-efficient compressor
- 11. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
- 12. Accurate helium leak detection system ensures the quality of the entire refrigeration system
- 13. Automatic defrost ensures the evaporator working to its optimum performance
- 14. Designed and engineered to operate up to 43°C ambient
- 15. Environmental-friendly CFC-free refrigerant (R134a)
- 16. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

# Glass Chiller

---

## Specification

- Accomodates 500 x 500mm basket
  - Foodsafe 304 grade stainless steel exterior and interior
  - Galvanised steel exterior back and base
  - Fitted with cylindrical lock
  - Fitted with 19ømm drainage for defrost water
- 

## Options

1. 304 grade stainless steel exterior back / base
  2. 220V / 60HZ / 1PH
- 

## Product List

**WGC1RSL (500 x 500 basket)**



**WGC2RSL (500 x 500 basket)**



# Glass Chiller Technical Data

Model	WGC1RSL (500 x 500 basket)	WGC2RSL (500 x 500 basket)
<b>Temp Range (°C)</b>	+1 / +5	+1 / +5
<b>External Dimension (mm)</b>		
Width	900	1600
Depth	700	
Height	850	
<b>Internal Dimension (mm)</b>		
Width	620	620 x 2
Depth	600	
Height	575	
<b>Thickness of 304 grade stainless steel (mm)</b>		
Exterior	0.7	
Interior	0.6	
<b>Opening Depth</b>	1370	
<b>Capacity (500 X 500mm basket)</b>	2	4
<b>Power Supply</b>	220V / 50HZ / 1PH 13 amp plug	
<b>Power Input - Running (amps) *</b>	5	
<b>Rating Power (watts) *</b>	1100	
<b>Compressor (HP)</b>	1/3	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	623	
<b>Remote condensing unit with housing (Width x Depth x Height) (mm)</b>	530 x 350 x 335	
<b>Refrigerant Pipe Size (inch)</b>		
Suction pipe	3/8	
Pressure pipe	1/4	
<b>Maximum pipe length work (m)</b>	8	
<b>Refrigerant</b>	R134a	

\* 20% increase for 60HZ power supply

Note: all models are fitted with 19ømm drainage for defrost water

# Wine Cabinet Key Features

Designed with industrial standard cooling system performance and contemporary design for reliability and stylish decor



01. Fitted with anti-condensation double glazed Argon gas glass door with aluminium alloy frame
02. Fully extendable pull-out type wooden wine rack to keep bottle canted at proper angle to keep corks moist and display wine in a decent way \*
03. Diamond type wooden wine rack to maximise wine storage capacity
04. Bright low energy LED with on / off switch for excellent product display and easy customer selection
05. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
06. Removable magnetic door gasket with air release points provides an excellent seal to prevent heat ingress
07. Dual-temp zone, upper part is +7 /+10°C for white wine and lower part is +12 / +16°C for red wine #
08. BC1W: 10Hmm levelling feet at front to ensure stability on an uneven floor and 15Hmm castors at rear
09. BC95W and BC200W: 10Hmm levelling feet to ensure stability on an uneven floor
10. Forced air refrigeration system ensures effective air circulation
11. Imported, durable and energy-efficient compressor
12. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
13. Accurate helium leak detection system ensures the quality of the entire refrigeration system
14. Automatic defrost ensures the evaporator working to its optimum performance
15. Automatically vaporises defrost water, drainage is not required
16. Designed and engineered to operate up to 32°C ambient
17. Environmental-friendly CFC-free refrigerant (R134a)
18. HACCP compliant

\* Not applicable for BC200W

# Applicable for BC95W-PR-DT only

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.



# Wine Cabinet

---

## Specification

- Black colour bond exterior and foodsafe 304 grade BA mirror stainless steel interior
  - Galvanised steel exterior back and base
  - Fitted with cylindrical lock
- 

## Options

1. 304 grade stainless steel exterior / back / base
2. Black colour bond exterior back
3. 220V / 60HZ / 1PH





# Wine Cabinet Product List

**BC1W-PR-U**                      **BC1W-DR-U**                      **BC95W-PR-DT**



**BC95W-PR**                      **BC95W-DR**                      **BC200W-DR**



# Wine Cabinet Technical Data

Model	BC1W-PR-U	BC1W-DR-U	BC95W-PR-DT	BC95W-PR	BC95W-DR	BC200W-DR
<b>Temp Range (°C)</b>	+4 / +22	+4 / +22	+7 / +10 +12 / +16	+4 / +22	+4 / +22	+4 / +22
<b>External Dimension (mm)</b>						
Width	600		645		1290	
Depth	530		635			
Height	800		1770			
<b>Internal Dimension (mm)</b>						
Width	530		545		1190	
Depth	378		510			
Height	650		1554			
<b>Thickness of black colour bond and 304 grade BA mirror stainless steel (mm)</b>						
Exterior (black colour bond)	0.6					
Interior (BA mirror stainless steel)	0.7					
<b>Opening Depth</b>	1073			1254		
<b>Capacity (cu.ft / litres)</b>	4.5 / 130			14.5 / 412		31.7 / 899
<b>Capacity (bottles @ 750ml)</b>	18	20	54	70	140	
<b>Power Supply</b>	220V / 50HZ / 1PH					
	13 amp plug					
<b>Power Input - Running (amps) *</b>	2			2.28		
<b>Rating Power (watts) *</b>	440			502		
<b>Compressor (HP)</b>	1/5			1/4		
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	287			485		
<b>Refrigerant</b>	R134a					
<b>Standard fittings</b>						
Wooden Wine Rack	3	1	9	9	1	2

\* 20% increase for 60HZ power supply



**Williams**  
**Professional Refrigeration**

# Mobile Banqueting Series

Williams mobile banqueting trollies are ideal for safely transferring large quantities of food products away from a kitchen to a banqueting area

# Heated & Refrigerated Key Features

Designed for safely transporting food from a kitchen to a serving/ banqueting area



01. All round non-marking bumper for added protection during transfer of cabinet
02. Built-in handles at four sides for easy mobility
03. Excellent thermal efficiency, high density 75mm thick polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
04. Removable anti-tilt trayslides to prevent tipping
05. Self-closing doors minimise cool air loss and reduce energy consumption
06. Over 90° door opening allows easy loading and stock checking
07. 155Hmm heavy duty, non-marking swivel and braked castors for easy positioning
08. CoolSmart controller with clear digital display is designed for easy operation
09. Fitted with circulation fans to ensure even temperature and fast warm-up throughout the cabinet \*
10. Equipped with manual re-set safety cut-out switch to prevent overheating \*
11. Anti-condensation door mullion heaters #
12. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps #
13. Forced air refrigeration system ensures effective air circulation #
14. Imported, durable and energy-efficient compressor #
15. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties #
16. Accurate helium leak detection system ensures the quality of the entire refrigeration system #
17. Automatic defrost ensures the evaporator working to its optimum performance #
18. Automatically vaporises defrost water, drainage is not required #
19. Designed and engineered to operate up to 43°C ambient #
20. Environmental-friendly CFC-free refrigerant (R134a) #
21. HACCP compliant

\* Available for MHC only

# Available for MRC only

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.



# Heated & Refrigerated

## Specification

- Accommodates 2/1 GN size
- Foodsafe 304 grade stainless steel exterior (including back and base) and interior
- Fitted with cylindrical lock

## Options

1. Freezer type \*
2. 220V / 60HZ / 1PH

\* Available for MRC only





# Heated & Refrigerated Product List

MHC10SS	MHC16SS	MHC32SS
		
MRC10SS	MRC16SS	MRC32SS
		

# Heated & Refrigerated Technical Data

Model	MHC10SS	MHC16SS	MHC32SS	MRC10SS	MRC16SS	MRC32SS
<b>Temp Range (°C)</b>	+78 / +82	+78 / +82	+78 / +82	+1 / +4	+1 / +4	+1 / +4
<b>External Dimension (mm)</b>						
Width	807		1470	807		1470
Depth	885					
Height	1371	1768		1603	2000	
<b>Internal Dimension (mm)</b>						
Width	590		1250	590		1250
Depth	650					
Height	918	1315		833	1230	
<b>Thickness of 304 grade stainless steel (mm)</b>						
Exterior	0.7					
Interior	0.6					
Door	0.8					
<b>Opening Depth (mm)</b>	1480					
<b>Capacity (cu.ft / litres)</b>	13.8 / 391	19.4 / 550	41.3 / 1172	13.5 / 384	19.2 / 544	40.9 / 1159
<b>Power Supply</b>	220V / 50HZ / 1PH					
	13 amp plug		32 amp 3p IP67 plug	13 amp plug		
<b>Power Input - Running (amps) *</b>	6	13	18	2.4	3	3.5
<b>Rating Power (watts) *</b>	1320	2860	3960	528	660	770
<b>Compressor (HP)</b>	N/A			1/4		1/3
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	N/A			485		623
<b>Refrigerant</b>	N/A			R134a		
<b>Standard fittings</b>						
Trayslides (pair)	10	16	32	10	16	32

\* 20% increase for 60HZ power supply




**Williams**  
**Professional Refrigeration**

# Modular Series

Williams modular roll-in series provides high quality construction with excellent thermal insulation and installation flexibility. It is an ideal solution for larger catering requirements

# Ruby Key Features

Stainless steel modular roll-in food storage cabinet offers high quality construction with excellent insulation in a range of temperatures - ideal for larger catering requirements

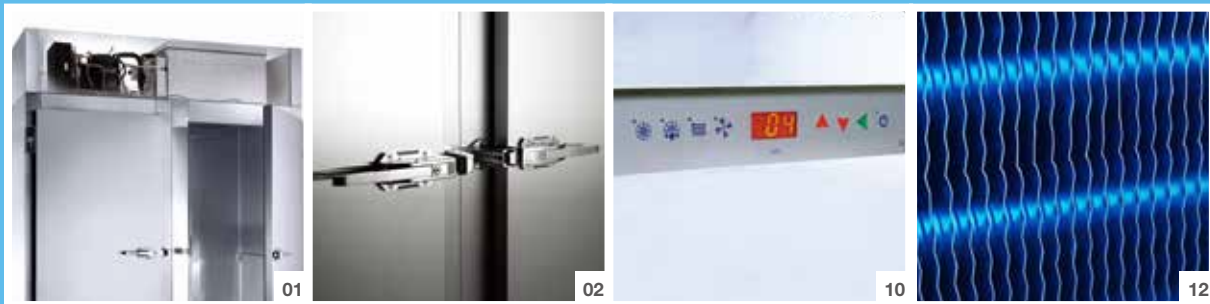

- 01. Top-mounted POD refrigeration system for easy installation and servicing
- 02. Fitted with latch door lock for added security
- 03. Modular construction design provides ease of transportation, flexibility and facilitates installation in areas with restricted access
- 04. Cam-locked modular panels ensure each section fits tightly together
- 05. Fitted with 90mm thick insulated floor for uneven floor or avoid condensation occurring on the ceiling of lower floor
- 06. Excellent thermal efficiency, high density 90mm thick polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
- 07. Anti-condensation door mullion heaters
- 08. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
- 09. Forced air refrigeration system ensures effective air circulation
- 10. CoolSmart controller with clear digital display is designed for easy operation, it also features with built-in alarm and fail safe run facility
- 11. Imported, durable and energy-efficient compressor
- 12. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
- 13. Accurate helium leak detection system ensures the quality of the entire refrigeration system
- 14. Automatic defrost ensures the evaporator working to its optimum performance
- 15. Automatically vaporises defrost water, drainage is not required
- 16. Designed and engineered to operate up to 43°C ambient
- 17. Environmental-friendly CFC-free refrigerant (R134a or R404a)
- 18. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

# Ruby

## Specification

- Accommodates 2/1 GN size trolley (Trolley is not included)
- Foodsafe 304 grade stainless steel exterior (including back) and interior

## Options

1. Internal LED
2. Heated film glass door \*
3. Roll through door (add 57mm to depth)
4. Ramp
5. Left-hand-side door hinge
6. 220V / 60HZ / 1PH

\* Available for HRMR1T, HRMR2T and HRMR3T only



## Product List

RMR1T	RMR2T	RMR3T
		



# Ruby Technical Data

Model	HRMR1T	MRMR1T	LRMR1T	HRMR2T	MRMR2T
<b>Temp Range (°C)</b>	+1 / +4	-2 / +2	-19 / -22	+1 / +4	-2 / +2
<b>External Dimension (mm)</b>					
Width	905		1850		
Depth	982				
Height	2460				
<b>Internal Dimension (mm) (excluding bumpers)</b>					
Width	689		707 x 2		
Depth	814				
Height	1890 (access height is 1840)				
<b>Thickness of 304 grade stainless steel (mm)</b>					
Exterior	0.7				
Interior	0.6				
Door	0.8				
<b>Opening Depth (mm)</b>	1780				
<b>Capacity (cu.ft / litres)</b>	43.6 / 1237		98.9 / 2801		
<b>Capacity (2/1 GN trolley)</b>	1		2		
<b>Power Supply</b>	220V / 50HZ / 1PH				
	13 amp plug				
<b>Power Input - Running (amps) *</b>	4		7		
<b>Rating Power (watts) *</b>	880		1540		
<b>Compressor (HP)</b>	1/2		1	3/4	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	1056		2327	1289	
<b>Refrigerant</b>	R134a		R404a	R134a	

\* 20% increase for 60HZ power supply

# Ruby Technical Data

Model	LRMR2T	HRMR3T	MRMR3T	LRMR3T
<b>Temp Range (°C)</b>	-19 / -22	+1 / +4	-2 / +2	-19 / -22
<b>External Dimension (mm)</b>				
Width	1850	2795		
Depth	982			
Height	2460			
<b>Internal Dimension (mm) (excluding bumpers)</b>				
Width	707 x 2	707 x 3		
Depth	814			
Height	1890 (access height is 1840)			
<b>Thickness of 304 grade stainless steel (mm)</b>				
Exterior	0.7			
Interior	0.6			
Door	0.8			
<b>Opening Depth (mm)</b>	1780			
<b>Capacity (cu.ft / litres)</b>	98.9 / 2801	153.9 / 4359		
<b>Capacity (2/1 GN trolley)</b>	2	3		
<b>Power Supply</b>	220V / 50HZ / 1PH			
	20 amp direct connection	13 amp plug		20 amp direct connection
<b>Power Input - Running (amps) *</b>	9	11		20
<b>Rating Power (watts) *</b>	1980	2420		4400
<b>Compressor (HP)</b>	2	1		1 (x2)
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	4458	1816		6678
<b>Refrigerant</b>	R404a	R134a		R404a

\* 20% increase for 60HZ power supply



+3°C

• 90  
• 240

28

14

williams

Williams  
Professional Refrigeration

# Blast Chiller Series

From small sized caterers to large food service providers, Williams offers compact or modular roll-in type blast chillers





# Why use Blast Chiller or Freezer ?

Food safety is of utmost importance in all food industries. Time and temperature relationship are critical to the growth and spread of contamination. Bacteria multiplies very fast between +8°C and +68°C (Danger Zone). The faster cooked foods chills and passes through this danger zone, the less chance there will be of bacteria growth. As a bacterium can split into 2 in every 20 minutes and multiply almost 69 million within 12 hours.



Standard storage fridges and cold rooms are designed for holding previously chilled foods, but not for chilling hot foods. To put hot food in a fridges or cold rooms already holding chilled foods is extremely dangerous, because of the rise of the fridge's temperature lifting the temperature of previously chilled foods and risking by bacterial contamination of all products in the fridge.




# Blast Chilling

+90°C → +3°C in 90 minutes

The only way to rapidly chill cooked foods safely is by using blast chillers. The principal feature of blast chillers is that they are capable of rapidly reducing the temperature of hot foods (+90°C) to a low, safe temperature (+3°C) in 90 minutes. This eliminates the risk of bacterial proliferation from slow cooling, and retains the foods' quality, nutritional value, flavour, appearance and also extends its shelf life.



## Blast Chilling +90°C → +3°C in 90 minutes

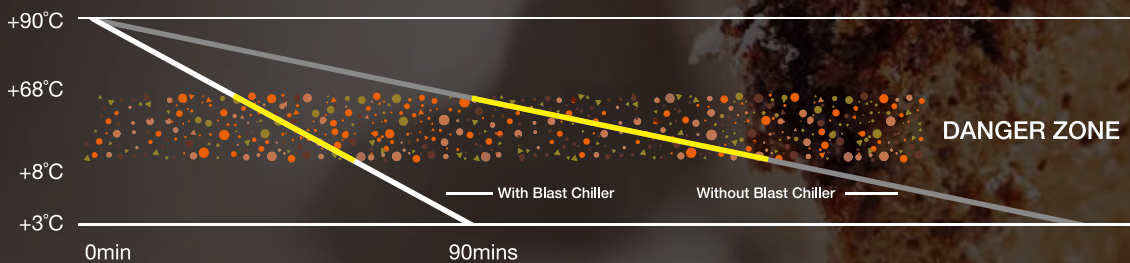

Williams Blast Chillers offer options of Soft Blast Chilling and Hard Blast Chilling for different types of foods.

## SOFT BLAST CHILLING

Soft Blast Chilling is to gently chill delicate and light products from +90°C to +3°C in 90 minutes with the air temperature remaining above 0°C. Examples include fish, fruits, vegetables, cream, desserts and fried foods. It ensures the texture, flavour, aroma, appearance and nutritional value are preserved.



## HARD BLAST CHILLING


Hard Blast Chilling is to chill dense and large products with higher fat contents such as meat joints, meat based sauces, mashed potato and lasagne. The air temperature drops below freezing point during the cycle ensuring the products reach the required +3°C within 90 minutes without the risk of freezing or damaging the foods.



# Blast Freezing

+90°C → -18°C in 240 minutes

By using a blast freezer, the temperature of the foods can be rapidly reduced from +90°C to -18°C within the guideline time of 240 minutes. The blast freezing cycle transforms the liquid present in the foods into microcrystals (tiny crystals) which do not damage the tissue structure of the product and ensures the food does not lose its consistency and integrity. This enables you to store the foods ready for thaw, regeneration and service for up to several months. Blast freezing can also be applied for raw materials and semi manufactured products.



## Blast Freezing +90°C → -18°C in 240 minutes





# The Benefits

All of the benefits can make the operation more efficient while offering customers greater choice and better quality. It allows the caterers to cope with large numbers of customers and at short notice. This will result in increased turnover and profitability.

## 1 Effective Time Management

Using the blast chiller, it is easy to prepare large quantities of foods in advance for later. Chefs no longer repeat the cooking process every day and it also helps the efficient use of other cooking equipment.



## 2 Enhanced Quality of Foods

Blast chilling immediately preserves the moisture level of goods and prevents bacterial growth. Blast freezing prevents the food molecules from being damaged by macro-crystallization. The moisture, firmness and flavour can be maintained after defrosting.

## 3 Effective Resource Management

Labour and equipment can be used more efficiently while ingredients can be brought in larger quantities, providing economies of scale.



## 4 Reduced Food Wastage

Food can be chilled safely with a longer shelf life. Portions can be made precisely and foods can then be regenerated as required.



## 6 Prevents Food Weight Loss

The natural evaporation of moisture from cooked food would lead to weight loss. Using a blast chiller after the cooking process would stop evaporation and thus help to stop the loss of water and the food's weight.



## 5 Wider Menu

Using a blast chiller allows the chefs to prepare a greater selection of dishes, offering customers more choices while still maintaining the quality.



## 7 Increased Profitability


If the meal turnover is limited by the number of meals you are able to cook and serve within your existing kitchen, using a blast chiller is a fast way to increase the business' capacity without necessarily expanding the kitchen or employing extra kitchen staff.



# Why Williams?

## Williams Easy Blast 1-2-3 Controller

The unique Williams Easy Blast 1-2-3 controller has been designed to make our equipment easy to operate with a clear and easy to read digital display and just 3 simple steps to initiate a blast chill or blast freeze cycle.

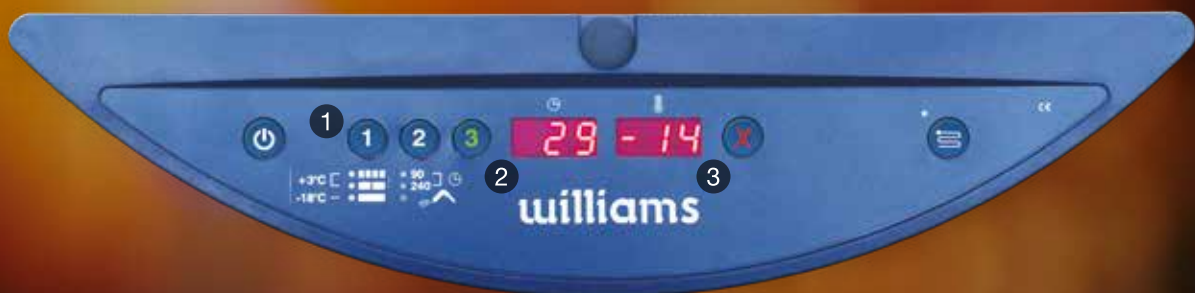

### 1 3 Simple Steps to start ...

- (1) Select Soft Chill, Hard Chill or Freeze cycle (for blast chiller freezer model)
- (2) Select time cycle (90 minutes for chill, 240 minutes for freeze) or food temperature probe controlled cycle
- (3) Press to start cycle

### 2 Time Display

Displays the time elapsed during cycle, offering more flexibility, enabling the cycle to be stopped for half loads or delicate products

### 3 Temperature Display


Shows the food probe/ air temperature

Williams Easy Blast Controller offers many users and engineering benefits:


- Simple to repeat last programme
- Equipment can be customised locally by commissioning the control panel parameters to suit different product type or site requirements—for enhancing user flexibility
- Controller diagnostics enable quick fault finding for easy servicing and maintenance
- Audible alarm at the end of each cycle and when error occurs

# Williams Unique AirSmart Advanced Airflow System

Airflow (elevation view)

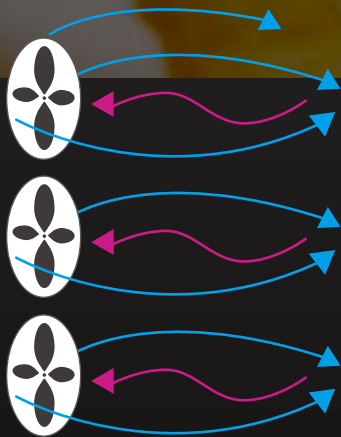

Airflow (top view)

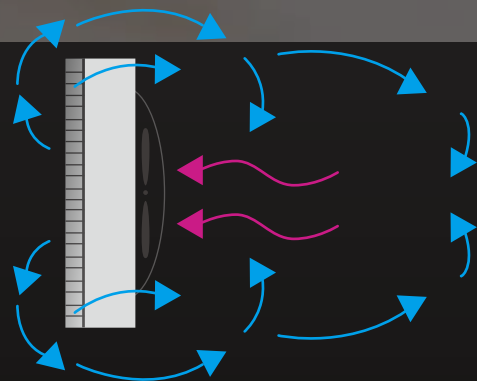

- Powerful, energy efficient fans and the equalised air pressure chamber design ensures that the air flows evenly over all products
- Guaranteed uniform rapid chilling prevents the risk of dehydrating or skinning of the products
- Ensures the food products stay in perfect condition by preserving their flavour, texture, aroma, appearance and nutritional value
- If using a blast chiller or freezer and a full load is not required, reducing the food thickness and distributing over more pans/ shelves can speed up chilling times



# Features

---



## **Built-in Thermal Printer** (Roll-in type only)

Standard on modular roll-in products, easy to print out blast cycle record for HACCP requirement. The high quality thermal IP65 rated printer with a protective cover, features longer lasting print quality and clear recording of all blast chill/ freeze and storage information with space for user to show specific product detail. The printer is designed to store up to 7-days worth of data, thus the data can be safely stored even if the printer paper runs out.



## **Core Food Temperature Probes**

The precise food probes make it easy to monitor core temperature and ensures perfect temperature control every time.




## **High Velocity Fans**

Large diameter energy efficient, high velocity fans offer advanced airflow for uniform chilling and freezing across all products thus preventing cell damage and dehydration, ensuring excellent product quality every time.



## **Easy Access Evaporator**

Designed to make servicing and maintenance simple with easy access to fan for inspection, repair or replacement.

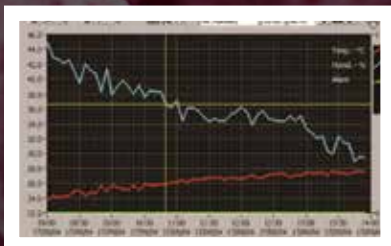

## **HACCP Control Software**

The optional dedicated software is designed for temperature monitoring, blast cycle data storage and printing and alarm management.

### Others:

- Full 304 grade stainless steel construction for assured food safety and hygiene
- Automatic defrost at the end of each cycle and every six hours in storage mode ensuring efficient and effective performance
- All models automatically switch to storage mode at the end of each blast chill cycle offering additional storage capacity
- Range of models to suit all types of requirements and environments

# POD System (optional)

---

The Williams unique POD system offers an excellent energy efficient solution should the Roll-in type Blast Chillers, Chiller Freezers and Freezers be used for supplementary or overnight storage and reduces the wear and tear on the Blast Chiller system, extending its life.

## Benefits:

- Designed to give maximum storage with no wasted refrigerated space – lower running costs
- Serviced from outside cabinet – door can remain closed during service and repairs
- Defrost heaters outside cabinet – minimal temperature increase on defrost
- Available with pre-installed condensing unit – reducing on site costs
- Low-level systems available where height is restricted – flexibility ensured



# Thawing

---

Along with blast chilling, the thawing of frozen products can often be a food safety issue unless the correct equipment is used. While thawing the products in a warm kitchen for several hours or overnight, water molecules will concentrate and wet the surface of products. The warm temperature plus the high humidity will accelerate the growth of bacteria.

Using a standard refrigerator to thaw frozen products is also not effective. As the cool temperature keeps constant and without forced air circulation inside the cabinet, the temperature difference between the frozen products and the cabinet inside is not effective enough to bring the heat into the core of products.



In addition, cooking thawed food is quicker and safer than from frozen as it can eliminate the risk of cold spots once cooking has finished, making the cook-chill process more effective and energy efficient.

Please refer to the Overnight Thaw series to know more about our products.



# Reach-in Key Features

Space saving and compact design for effective blast chilling

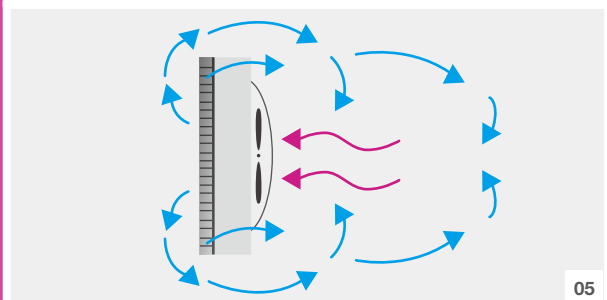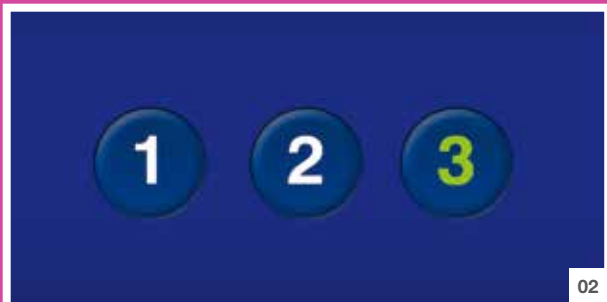

01. Choice of models to accommodate 10 to 50 kg 1/1 GN and 400 x 600 EN containers with compact footprints
02. Easy to use, 1-2-3 state of the art control panel - 3 simple steps to initiate blast cycle
03. Clear LED display for the time and temperature
04. Choice of hard chill, soft chill, blast freeze and core food temperature probe controlled cycles with audible alarm indicating end of cycle
05. Unique advanced airflow design for even chilling of product load throughout cabinet
06. One core food temperature probe for simple operation, accurate measurement and control
07. Easy to access refrigeration system for servicing and maintenance
08. Automatic defrost at the end of every blast cycle and every 6 hours in storage mode ensuring efficient and effective performance
09. Automatically switches to storage mode at the end of each cycle before transferring to appropriate storage cabinet, maximising the efficient working practices
10. Fitted with heavy duty, non-marking swivel and braked castors for easy positioning
11. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)



12. Anti-condensation door mullion heaters
13. Self-closing doors minimise cool air loss and reduce energy consumption
14. Over 90° door opening allows easy loading
15. Hygienic one-piece dished base with radiused corners avoids potential dirt traps
16. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
17. Imported, durable and energy-efficient compressor
18. Condenser and evaporator with Cataphoresis plated coils provides high corrosion resistance properties
19. Accurate helium leak detection system ensures the quality of the entire refrigeration system
20. Automatically vaporises defrost water, drainage is not required \*
21. Designed and engineered to operate up to 43°C ambient
22. Environmental-friendly CFC-free refrigerant (R404a)
23. HACCP compliant



10



12



15



18

\* Available for WBC/F10UR - 40UR only

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

# Reach-in

## Specification

- Accommodates 1/1 GN size and 400 x 600mm EN size
- Foodsafe 304 grade stainless steel exterior and interior
- Galvanized steel exterior back and base
- Blast Chiller blast chill from +90°C to +3°C in 90 minutes
- Blast Chiller Freezer blast freeze from +90°C to -18°C in 240 minutes
- Fitted with 19ømm drainage for defrost water #

\* Applicable to WBC/F10UR - 40UR only

# Applicable to WBC/F50UR only

## Options

1. 304 grade stainless steel exterior back / base
2. Cylindrical lock
3. Left-hand-side door hinge
4. 220V / 60HZ / 1PH \*
5. 380V / 60HZ / 3PH #

## Product List

WBC/F10UR	WBC/F20UR	WBC/F30UR
		
WBC/F40UR		WBC/F50UR
		

# Reach-in Technical Data

Model	WBC/F10UR	WBC/F20UR	WBC/F30UR	WBC/F40UR	WBC/F50UR
<b>Temp Range (°C)</b>					
Blast Chill	+90 to +3 in 90 mins				
Blast Freeze	+90 to -18 in 240 mins				
<b>External Dimension (mm)</b>					
Width	777				
Depth	879				
Height	885	1290	1735	1905	
<b>Internal Dimension (mm)</b>					
Width	657				
Depth	425				
Height	380	700	1020	1195	
<b>Thickness of 304 grade stainless steel (mm)</b>					
Exterior	0.7				
Interior	0.6				
Door	0.7				
<b>Opening Depth (mm)</b>					
1615					
<b>Capacity (kg)</b>					
	10	20	30	40	50
<b>Evaporator Fans</b>					
	1	2	3		
<b>Power Supply</b>					
	220V / 50HZ / 1PH				380V / 50HZ / 3PH
	13 amp plug		16 amp direct connection		
<b>Power Input - Running (amps) *</b>					
	3.8	5	9.9	5.8	
<b>Rating Power (watts) *</b>					
	836	1100	2178	3817	
<b>Compressor (HP)</b>					
	9/16	1-1/8	1-3/4	2	
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>					
	1286	2221	3482	3804	
<b>Refrigerant</b>					
	R404a				
<b>Standard fittings</b>					
Trayslides (pair)	3	6	10	13	

\* 20% increase for 60HZ power supply

Note: WBC/F50UR is fitted with 19ømm drainage for defrost water



# Roll-in Key Features

Modular construction design blast chiller / freezer allows easy transportation, flexible installation and easy access of trolley



01. Choice of Blast Chiller Freezer models (90kg to 320kg) and Blast Freezer models (100kg and 200kg) to accommodate 2/1 GN size trolley to suit any catering requirement (Optional combi size models accommodate most of the combi trolleys in the market)
02. Easy to use, 1-2-3 state of the art control panel - 3 simple steps to initiate blast cycle
03. Clear LED display for the time and temperature
04. Choice of hard chill, soft chill, blast freeze and core food temperature probe controlled cycles with audible alarm indicating end of cycle
05. Cam-lock modular panels allow the ease of on-site installation and disassembly for delivery
06. High quality thermal printer for blast cycle data storage and print out for full HACCP compliance (IP65 protected)
07. Large, high velocity fans and large area evaporator offering advanced airflow design enabling uniform freezing across the product for consistent product quality
08. Three core food temperature probes for simple operation, accurate measurement and control

- 
09. Easy to access expansion valve for superheat adjustment making commissioning easier
  10. Easy to access evaporator for servicing and maintenance
  11. Automatic defrost at the end of every blast cycle and every 6 hours in storage mode ensuring efficient and effective performance
  12. Automatically switches to storage mode at the end of each cycle before transferring to appropriate storage cabinet, maximising the efficient working practices
  13. Optional energy efficient POD refrigeration system designed for overnight storage and reducing the wear and tear on the refrigeration system, extending its life
  14. Fitted with 90mm thick insulated floor for an uneven floor or avoid condensation occurring on the ceiling of lower floor \*
  15. Excellent thermal efficiency, high density 90mm thick polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
  16. Anti-condensation door mullion heaters
  17. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps
  18. Evaporator with Cataphoresis plated coils provides high corrosion resistance properties
  19. Accurate helium leak detection system ensures the quality of the evaporator
  20. Designed for environmental-friendly CFC-free refrigerant (R404a)
  21. HACCP compliant

\* Available for WMBCF and WMBF only

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

# Roll-in

## Specification

- Accommodates 2/1 GN size trolley (Trolley is not included)
- Foodsafe 304 grade stainless steel exterior (including back) and interior
- Blast Chiller blast chill from +90°C to +3°C in 90 minutes
- Blast Chiller Freezer / Blast Freezer blast freeze from +90°C to -18°C in 240 minutes
- Fitted with 22ømm drainage for defrost water

Note: Condensing unit and refrigerant (R404a) are not included, suggested specification please check with Williams team.

## Options

1. Storage POD system (add 200mm to height)
2. Roll through door
3. Ramp
4. 90mm thick insulated floor (with heater) \*
5. Accomodate combi size trolley (add 200mm to width)
6. 380V / 60HZ / 3PH

\* Included as standard for WMBCF and WMBF

## Product List

WMBC/F90, 120, 160, 200 and  
WMBF100



WMBC/F240, 320 and  
WMBF200



# Roll-in Technical Data

Model	WMBC/F90	WMBC/F120	WMBC/F160	WMBC/F200
<b>Temp Range (°C)</b>				
Blast Chill	+90 to +3 in 90 mins			
Blast Freeze	+90 to -18 in 240 mins			
<b>External Dimension (mm)</b>				
Width	1470 (1670 for combi size)			
Depth	1250			
Height	2295 (WMBC) 2385 (WMBCF)			
<b>Internal Dimension (mm)</b>				
Width	680 (880 for combi size)			
Depth	1036			
Height	1875			
<b>Thickness of 304 grade stainless steel (mm)</b>				
Exterior	0.7			
Interior	0.7			
Door	0.7			
<b>Opening Depth (mm)</b>				
2095				
<b>Capacity (kg)</b>				
	90	120	160	200
<b>Capacity (2/1 GN trolley)</b>				
1				
<b>Evaporator Fans</b>				
	2		3	
<b>Power Supply</b>				
	380V / 50HZ / 3PH			
	16 amp direct connection			
<b>Power Input - Running (amps) *</b>				
Blast	4.3		5.2	
Defrost	13.7			
<b>Rating Power ( watts) *</b>				
Blast	2830		3423	
Defrost	3014			
<b>Maximum pipe length work (m)</b>				
25				
<b>Refrigerant</b>				
R404a				

\* 20% increase for 60HZ power supply

Note:

1. All models are fitted with 22ømm drainage for defrost water
2. Suggested maximum food product thickness for blast chilling/ freezing is 40mm, and the elapsed time may vary based on the product type, size, density, entry temperature and environmental factors

# Roll-in Technical Data

Model	WMBC/F240	WMBC/F320	WMBF100 #	WMBF200 #	
<b>Temp Range (°C)</b>					
Blast Chill	+90 to +3 in 90 mins		N/A		
Blast Freeze	+90 to -18 in 240 mins				
<b>External Dimension (mm)</b>					
Width	1470 (1670 for combi size)				
Depth	2350		1250	2350	
Height	2295 (WMBC) / 2385 (WMBCF)		2385		
<b>Internal Dimension (mm)</b>					
Width	680 (880 for combi size)				
Depth	2136		1036	2136	
Height	1875				
<b>Thickness of 304 grade stainless steel (mm)</b>					
Exterior	0.7	Interior	0.7	Door	0.7
<b>Opening Depth (mm)</b>	3195		2095	3195	
<b>Capacity (kg)</b>	240	320	100	200	
<b>Capacity (2/1 GN trolley)</b>	2		1	2	
<b>Evaporator Fans</b>	4	6	3	6	
<b>Power Supply</b>	380V / 50HZ / 3PH				
	20 amp direct connection		16 amp direct connection	20 amp direct connection	
<b>Power Input - Running (amps) *</b>					
Blast	7.7		5	9	
Defrost	16.3		14	17	
<b>Rating Power (watts) *</b>					
Blast	5068		3291	5924	
Defrost	3586		3080	3740	
<b>Refrigerant Pipe Size (inch)</b>					
Suction pipe	1 1/8				
Pressure pipe	1/2				
<b>Max. Pipe Length Work (m)</b>	25				
<b>Refrigerant</b>	R404a				

\* 20% increase for 60HZ power supply

# The blast freeze cycle (from +90°C to -18°C) of WMBF models is within 90-240 minutes. The blast freezing efficiency of WMBF models are higher than WMBC/F models due to WMBF models are equipped with an extra evaporator fan in each chamber

Note:

1. All models are fitted with 22ømm drainage for defrost water
2. Suggested maximum food product thickness for blast chilling/ freezing is 40mm, and the elapsed time may vary based on the product type, size, density, entry temperature and environmental factors

# Contact Information

## UK Office

Bryggen Road, North Lynn Industrial Estate,  
King's Lynn, Norfolk PE30 2HZ  
T (44) 1553 817000  
F (44) 1553 817111  
E [info@williams-refrigeration.co.uk](mailto:info@williams-refrigeration.co.uk)  
W [www.williams-refrigeration.co.uk](http://www.williams-refrigeration.co.uk)

## Hong Kong Office

Unit C, 12/F., Roxy Industrial Centre,  
58 - 66 Tai Lin Pai Road, Kwai Chung, New Territories, Hong Kong  
T (852) 2407 5422  
F (852) 2407 3767  
E [sales@williams-hongkong.com](mailto:sales@williams-hongkong.com)  
W [www.williams-refrigeration.com.hk](http://www.williams-refrigeration.com.hk)

## Shanghai Office

Room 18C, Hai Xing Plaza,  
No.1 South Rui Jin Road, Huangpu District, Shanghai, China  
Zip code: 200023  
T (86) 21 5396 0183  
F (86) 21 5396 1335  
E [sales.service@williams-shanghai.com.cn](mailto:sales.service@williams-shanghai.com.cn)  
W [cn.williams-refrigeration.com.hk](http://cn.williams-refrigeration.com.hk)

## Dubai Office

607 Building 1B, Dubai Design District,  
P.O. Box 333215, Dubai, United Arab Emirates  
T (971) 4 5108203  
E [sales@williams-dubai.com](mailto:sales@williams-dubai.com)

## Australia Office

38-42 Gaine Road, Dandenong South,  
Victoria 3175, Australia  
T (61) 3 8787 4747  
F (61) 3 8787 4787  
E [sales@williamsref.com.au](mailto:sales@williamsref.com.au)  
W [www.williams-refrigeration.com.au](http://www.williams-refrigeration.com.au)



Allow adequate space for maintenance and ventilation. All refrigeration equipment requires adequate ventilation for efficient and effective performance. Williams reserve the right to modify the design, materials and finish in accordance with its progressive development policy.



